



ORIGINE  
FRANCE  
GRANTIE  
BY CAVE & CO. 01/2011

# INSPIRATION /

*High standards for storing and serving wine  
in the kitchen*

EUROCAVE 

# EUROCAVE

*Creator of the wine cabinet*

EuroCave, creator of wine cabinets and cellars, offers long term, premium solutions for wine preservation and service that respect the winemaker's intentions and enable faithful communication of these same intentions to demanding and discerning consumers.

The art of preservation and service contributes to enhancing the passionate experience related to wine, and is a part of the French art of living, synonymous with refinement and excellence.

Today, bolstered by a powerful network, a team of passionate advisors and a high-performance production plant, the brand can be found all over the world.

Cultivating excellence, EuroCave is the brand favoured by dedicated amateurs and the leading wine waiters in the most prestigious restaurants alike.



## *A signature ensuring*

EuroCave defends and shares the values of French elegance and know-how. This position is behind its choice of producing in France, as confirmed by the «Origine France» label.



BVCert. 6010761



EuroCave factory, Fourmies, France

# INSPIRATION /

## *High standards for storing and serving wine*

Clean lines, ergonomic curves...


Inspiration's design was devised to be timeless, perfectly complement your kitchen and provide unprecedented ease of use.

### *Four functions*




#### **Single-temperature Wine maturing cabinet**

Inspiration is set at 12°C and recreates the same conditions found in a natural cellar, by meeting the criteria essential for storing wine.




#### **Single-temperature Wine-serving cabinet**

Inspiration can be set to one temperature chosen between 5 and 20°, allowing you to have all of your bottles at an ideal serving temperature, according to the type of wine and selected temperature setting.



#### **Multi-temperature wine serving cabinet**

Inspiration offers up to 10 temperature zones (staggered from 5 - 20°C) allowing you to store several types of wine (rosé, white, red) at an ideal serving temperature within one same cabinet.



#### **2-temperature cabinet for serving wine and preserving one open bottle**

Inspiration has 2 temperature zones: 1 zone for bringing red wine to room temperature at the bottom (13 - 18°C) and a chilling zone at the top (6 - 11°C). This model offers an air vacuum system to allow you to store an open bottle for up to 10 days.\*

\* Depending on the wine and its vintage.

### *Two ways to install it*

#### **Built-in**

Built-in between 2 furnitures, installed on the floor.

#### **Flush-fitted**

Fitted in a kitchen furniture

### 3 types of shelves



Sliding

Storage

Serving

### and a choice of 2 types of finishes



Light oak or  
glossy black

4 cabinet sizes  
to offer a capacity of  
up to 89 bottles<sup>1</sup>



XS



S



M



L

1 - Capacity traditional Bordeaux bottles in  
Access Pack or Premium Pack configuration.



### Shelf labels

to identify your bottles of wine



### Open bottle air vacuum system head

Stores one open bottle for up to 10 days<sup>2</sup>.

2 - Only available for 2-temperature models

5  
YEAR  
WARRANTY



reddot design award  
winner 2018

### Doors<sup>3</sup>

which perfectly complement  
your kitchen

Full Glass



Stainless steel  
and glass




Technical  
glass



Technical  
solid door



3 - According to the cabinet's size

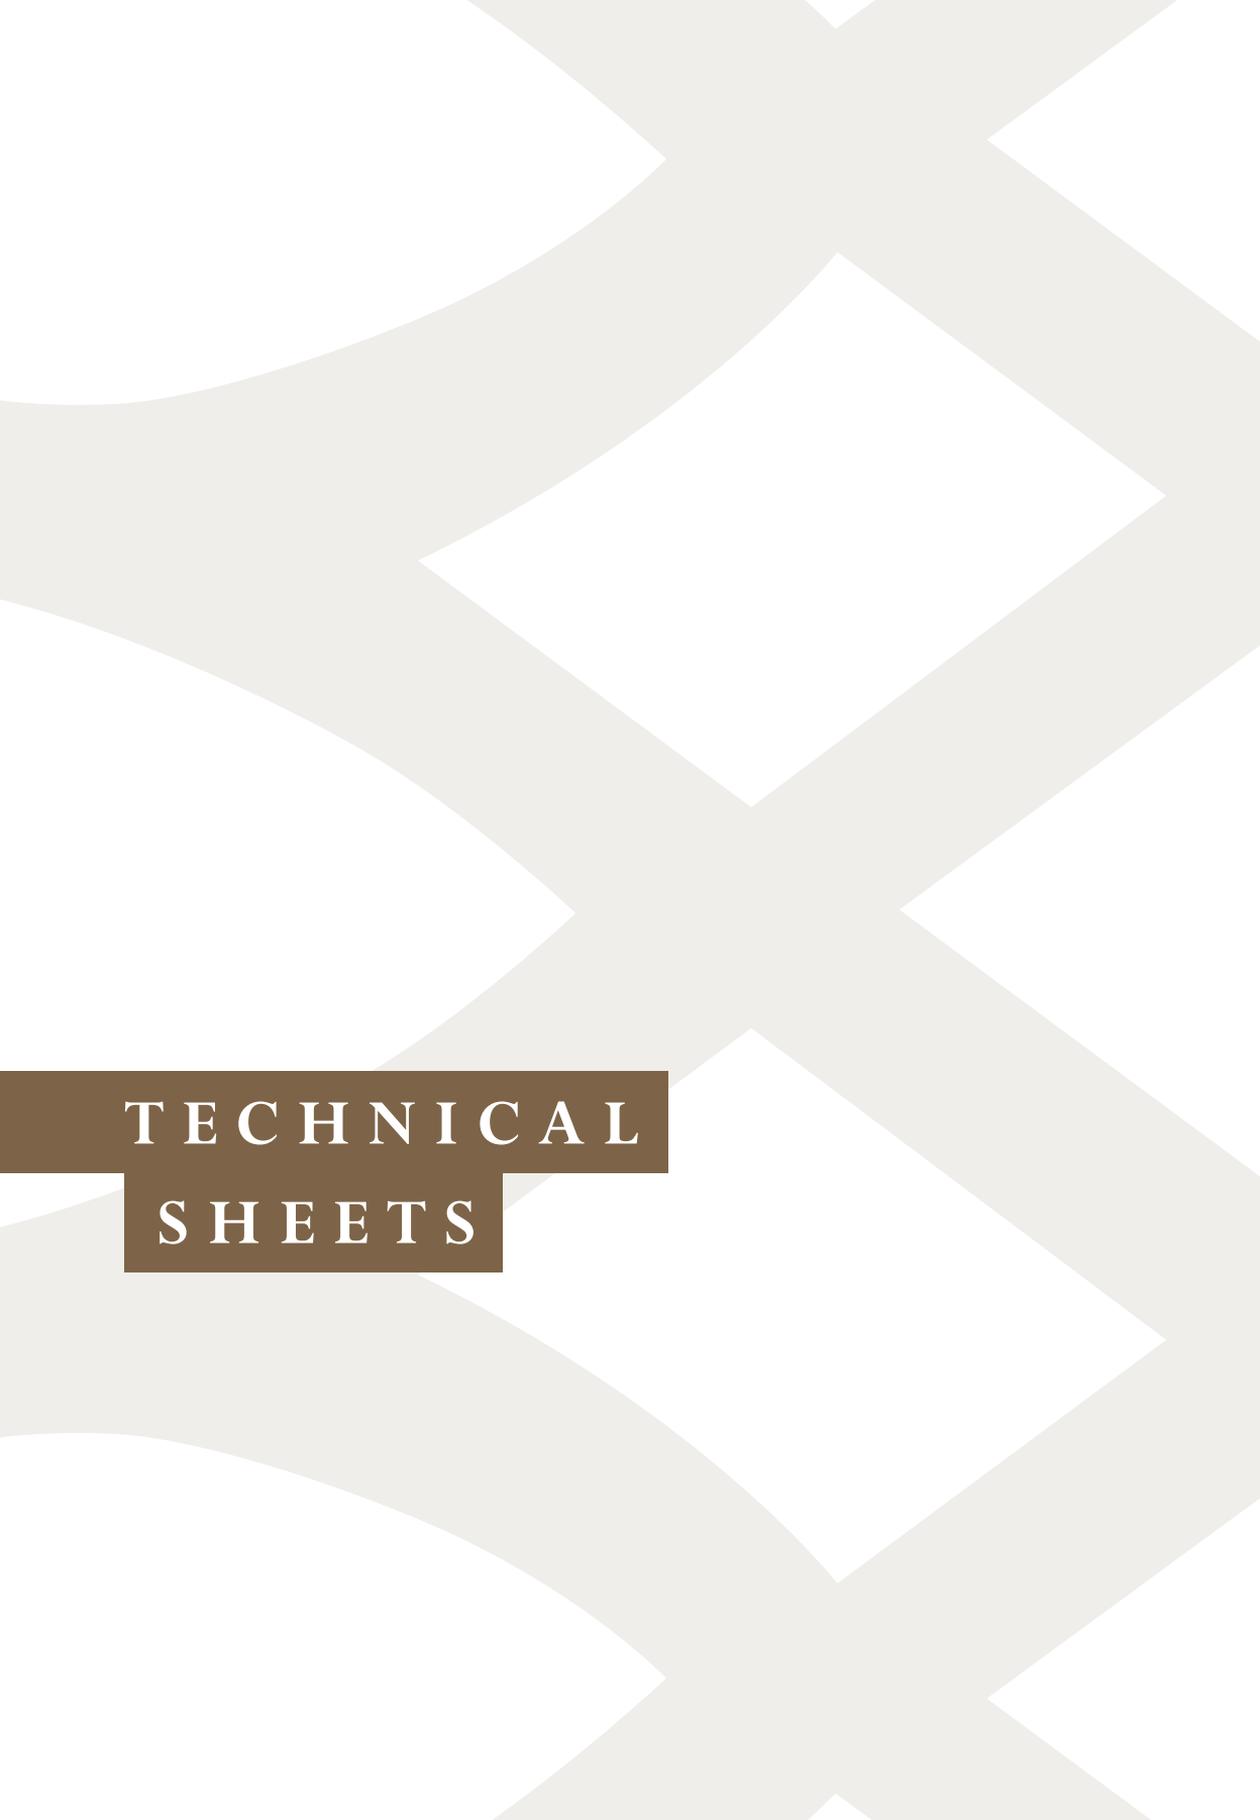

TECHNICAL  
SHEETS

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE

BV Cert. 6010761

## V-INSP-XS

Maturing cabinet  
Built-in and Flush-fitted – Full Glass door  
1-temperature

Sliding shelf  
(6 bottles)

ACMSIW  
ACMSIB



### CONFIGURATIONS

Premium Pack bottle capacity<sup>1</sup>

17

2 sliding shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged (kg)	53
Empty net weight (kg)	46,2
Dimensions H x W x D (mm)	620-690 x 594 <sup>2</sup> x 597
Dimensions in pack H x W x D (mm)	780 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- 2 sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- Total capacity: 17 bottles\*
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	139
Useful volume (liters)	65
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## V-INSP-S

Maturing cabinet

Built-in and Flush-fitted – Full Glass door

1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
29	28	30
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area	1 sliding shelf 1 storage shelf (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen with backlit tactile keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged empty (kg)	62,3
Empty net weight (kg)	53,8
Dimensions H x W x D (mm)	810-880 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Mains du Sommelier at the front of the shelf
- 6 removable bottles identifiers per shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

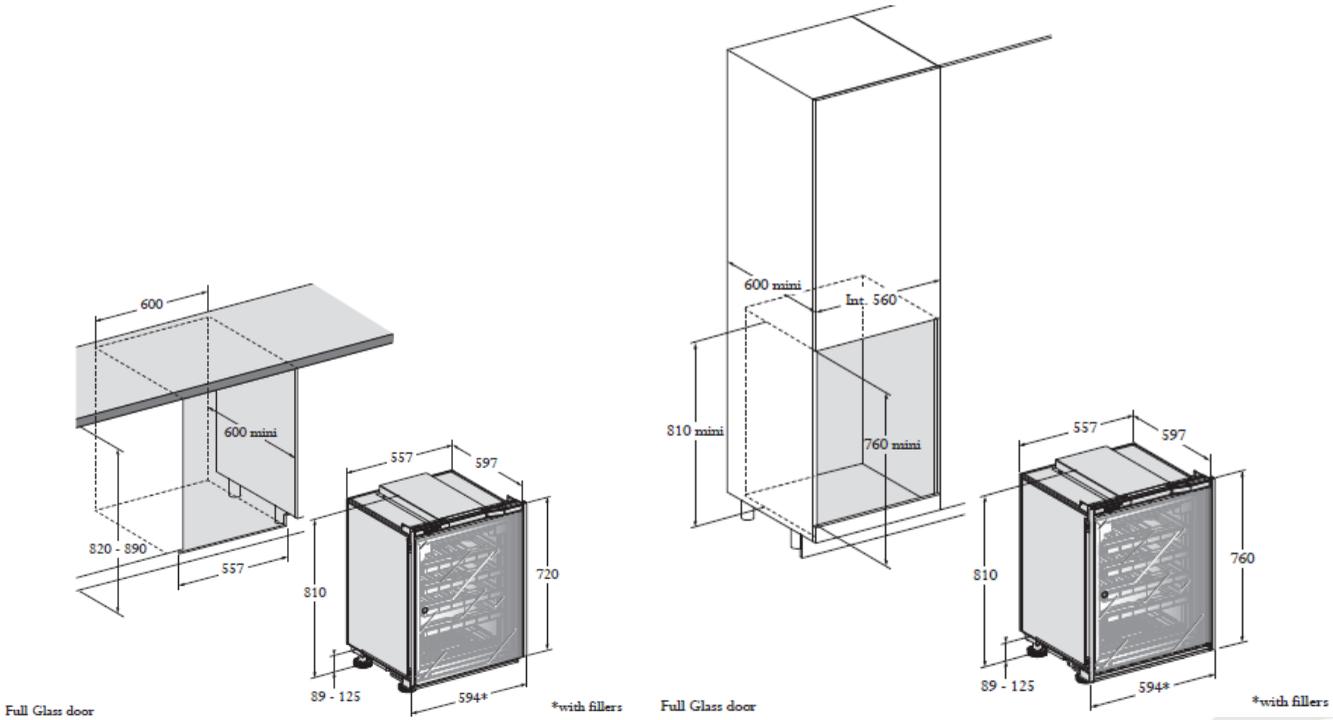


Built-in

Flush-fitted


## Storage layouts

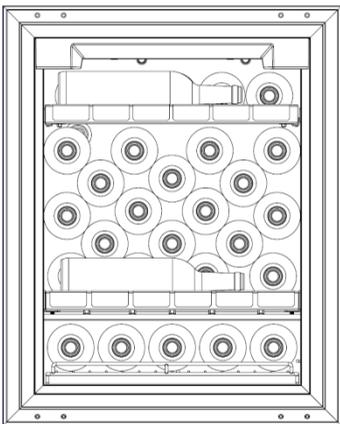

Access  
Pack

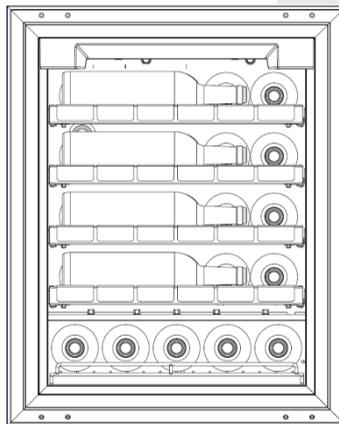

Premium  
Pack

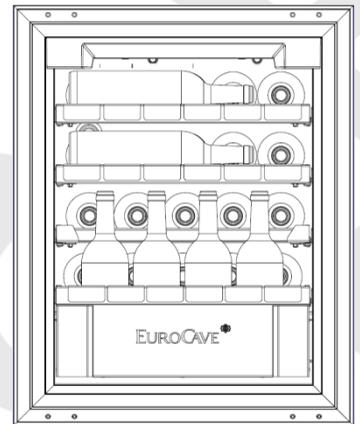

Service  
Pack

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE 5 ANS

## V-INSP-S

### Maturing cabinet

Built-in and Flush-fitted – Integrated glass door  
1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

#### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
29	28	30
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area	1 sliding shelf 1 storage shelf (+grid)

#### TECHNICAL FEATURES

##### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

##### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

#### GENERAL FEATURES

	Integrated glass
Gross weight packaged (kg)	61,2
Empty net weight (kg) <sup>2</sup>	52,7
Dimensions H x W x D (mm)	810-880 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

#### EQUIPEMENT & ACCESSOIRES

##### EQUIPMENT

- Reversible integrated glass door with soft close and door stop
- Max thickness of the door panel : 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge

##### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

#### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated glass
Energy efficiency class	A
Annual energy consumption AEC <sup>4</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> Without cladding


<sup>3</sup> Without fillers

<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Dimensions of the decorative panel

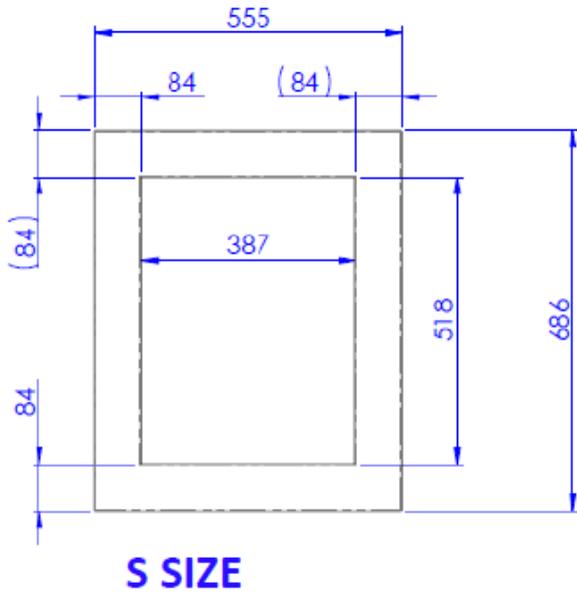


## Storage layouts



Premium Pack




Service Pack




Access Pack

## Installation diagrams

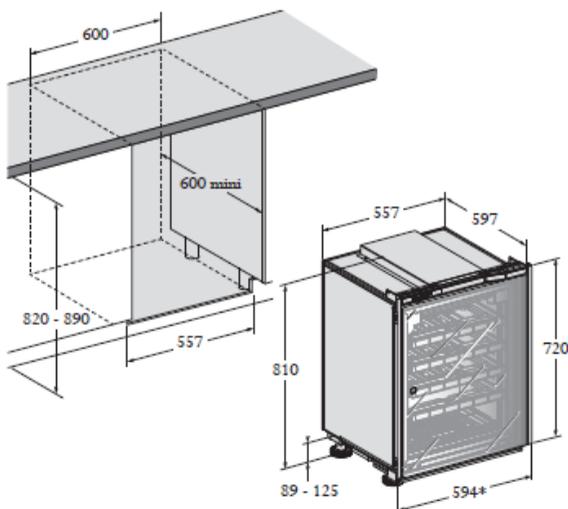

Built-in

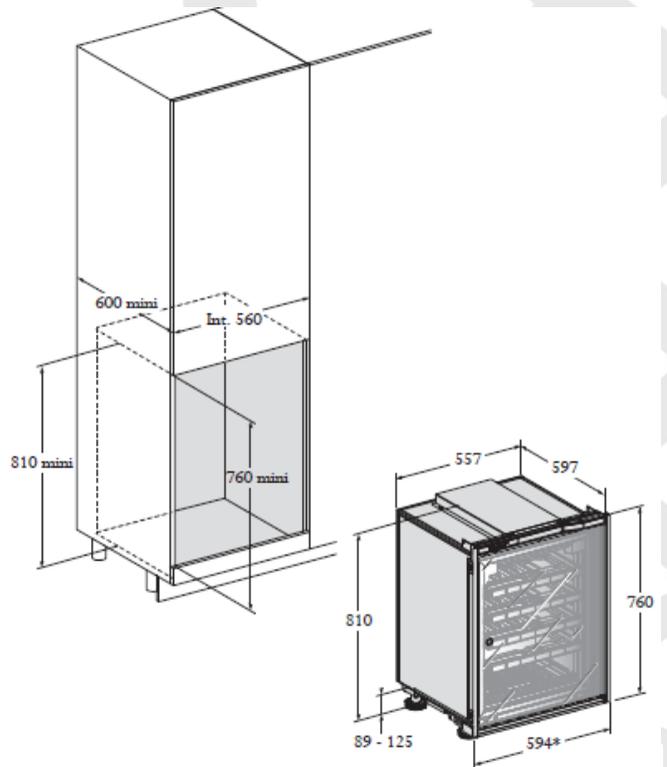

Flush-fitted

5 YEAR WARRANTY

## V-INSP-S

### Maturing cabinet

Built-in and Flush-fitted – Integrated solid door  
1-temperature

ORIGINE FRANCE GARANTIE



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Wine service area  
(11 bottles)  
ACMSEVW / ACMSEVB



Storage shelf  
(up to 22 bottles)  
AXIHW / AXIHB



Half shelf  
(5 bottles)  
ACMSI-DEMI

#### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
29	28	30
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area	1 sliding shelf 1 storage shelf (+grid)

#### TECHNICAL FEATURES

##### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

##### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

#### GENERAL FEATURES

	Integrated solid
Gross weight packaged (kg)	58,2
Empty net weight (kg) <sup>2</sup>	49,7
Dimensions H x W x D (mm)	810-880 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

#### EQUIPMENT & ACCESSORIES

##### EQUIPMENT

- Reversible integrated solid door with soft close and door stop
- Max thickness of the door panel: 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge

##### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

#### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated solid
Energy efficiency class	A+
Annual energy consumption AEC <sup>4</sup> (Kwh/year)	103
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> Without cladding

<sup>3</sup> Without fillers


<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## Dimensions of the decorative panel

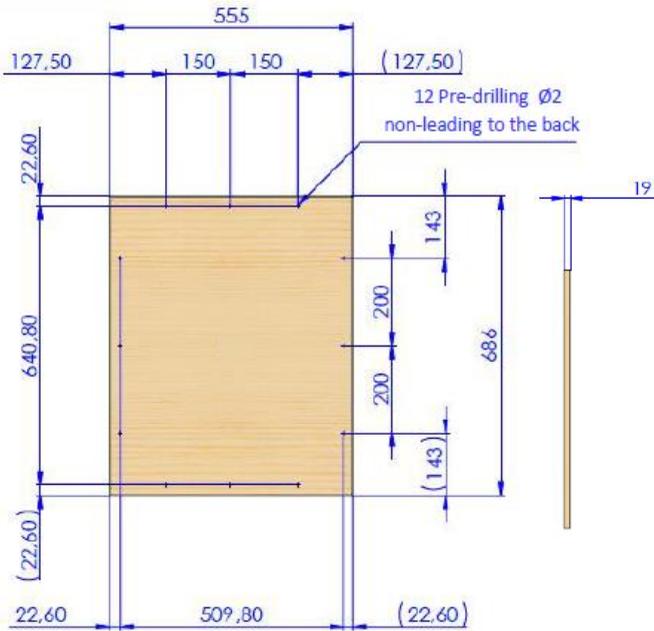


**S SIZE**


## Storage layouts



**Premium Pack**




**Service Pack**




**Access Pack**

## Installation diagrams

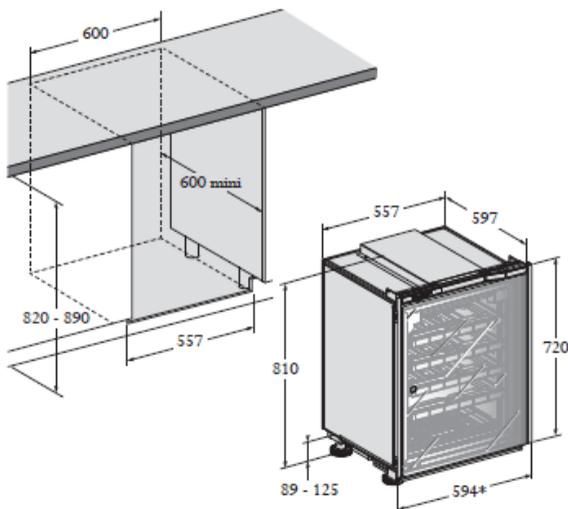

**Built-in**

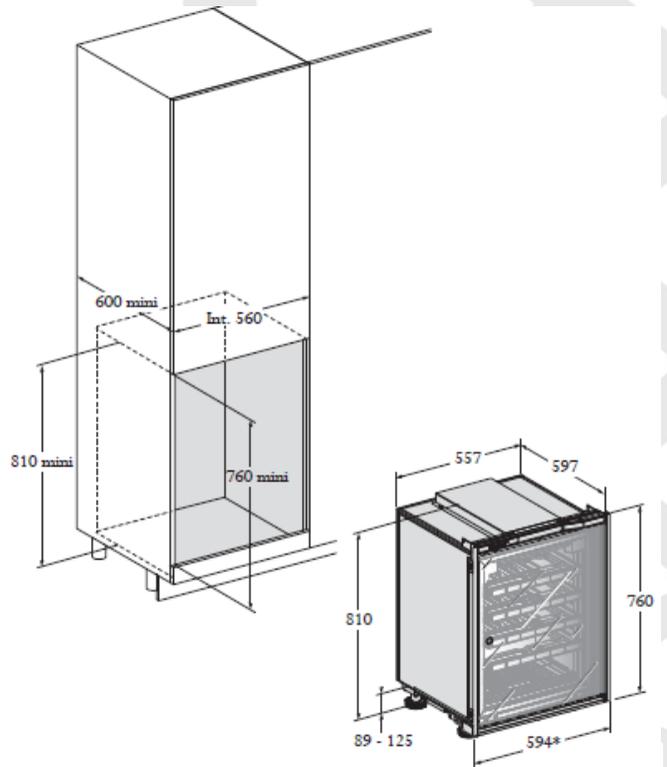

**Flush-fitted**

5 YEAR WARRANTY

## V-INSP-S

Maturing cabinet

Built-in and Flush-fitted – Stainless steel door

1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
29	28	30
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area	1 sliding shelf 1 storage shelf (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static • Compressor R600a
Cords:	• CE/UK/AU/CH/US
Heat production:	• Heating element
Heat release:	• Automatic, adjustable threshold
Inner material:	• Stucco aluminum
Exterior coating material:	• HDF (High Density Fiber) melamine-faced panels
Insulation type:	• Injected polyurethane foam (59mm)

### GENERAL FEATURES

	Stainless steel door
Gross weight packaged (kg)	62,8
Empty net weight (kg)	54,3
Dimensions H x W x D (mm)	810-880 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible stainless steel door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Stainless steel
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

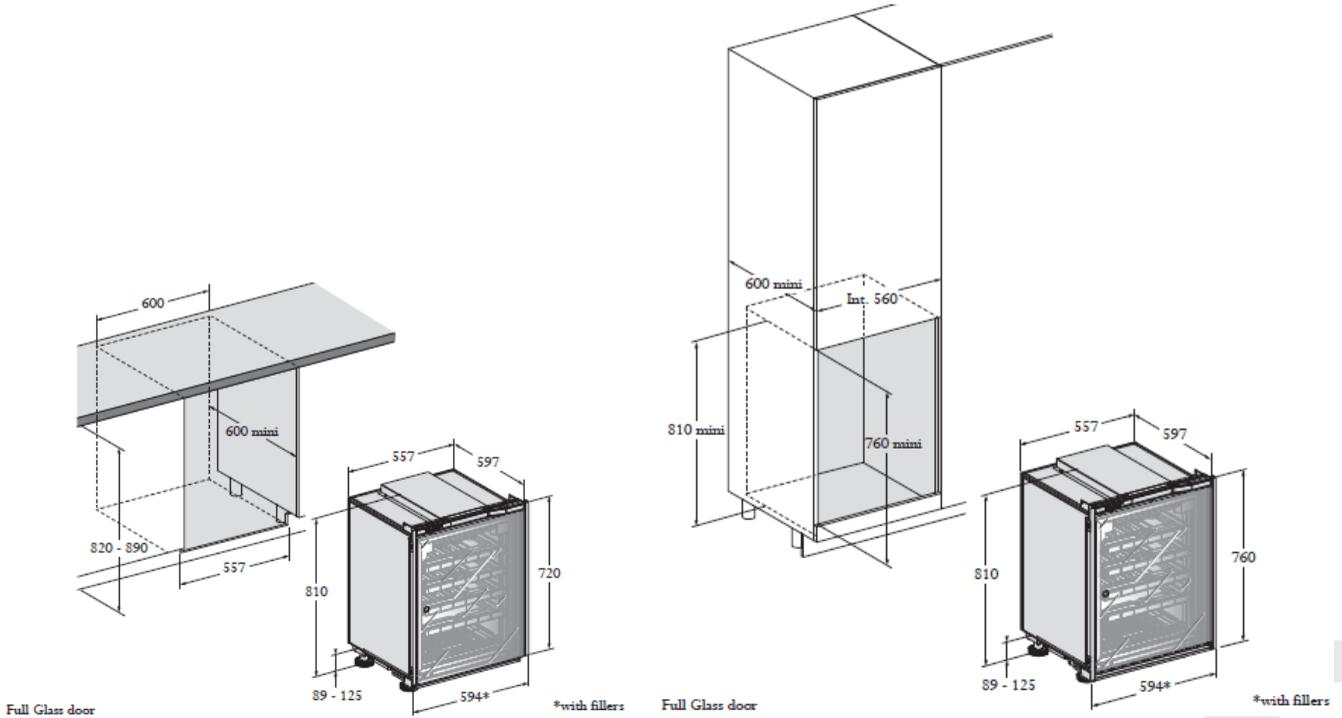


Built-in

Flush-fitted


## Storage layouts

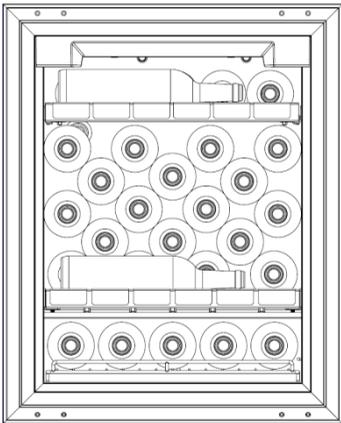

Access Pack

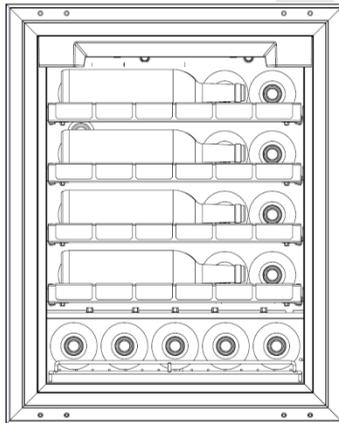

Premium Pack

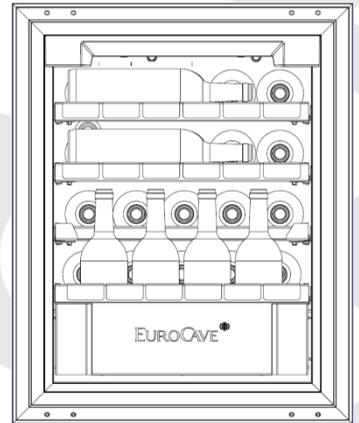

Service Pack

## S-INSP-S

Serving cabinet

Built-in and Flush-fitted – Full Glass door

Multi-temperatures



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Half shelf  
(5 bottles)  
ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range from 5°C to 20°C (5-10°C in the lower part and 15-20°C in the upper part). Temperature setting 8-18°C
- Electronic external display and settings
- LED screen with backlit tactile keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged empty (kg)	62,3
Empty net weight (kg)	53,8
Dimensions H x W x D (mm)	810-880 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Mains du Sommelier at the front of the shelf
- 6 removable bottles identifiers per shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles


<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## Installation diagrams

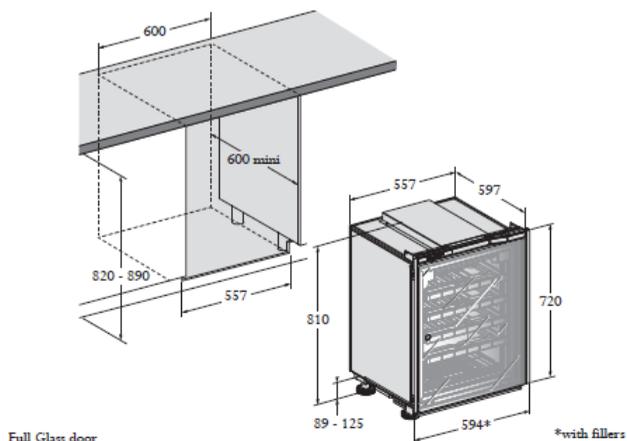


**Built-in**

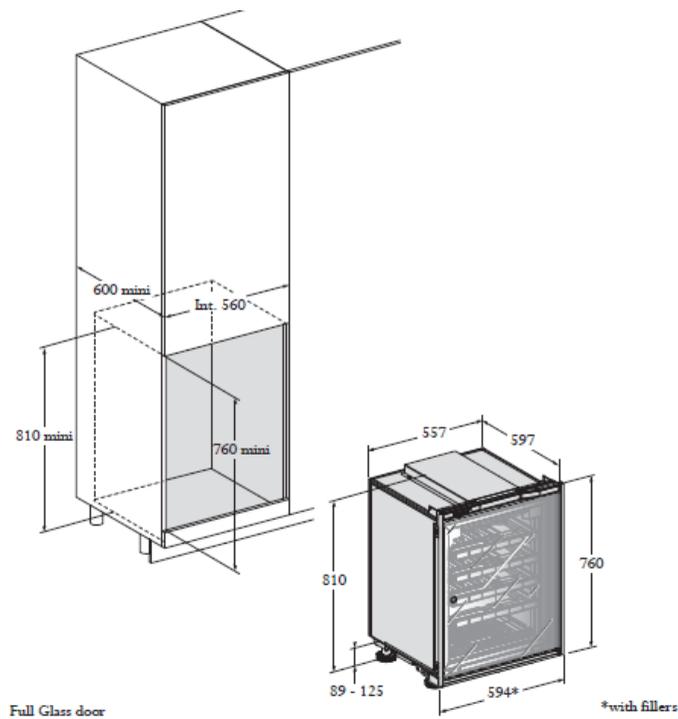


**Flush-fitted**

## Storage layouts

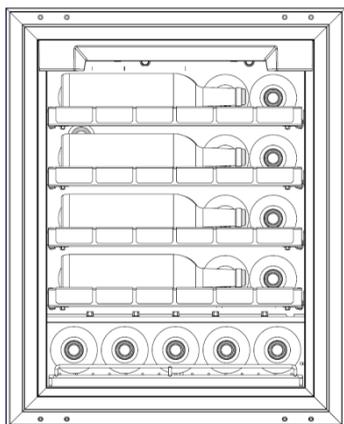

**Premium  
Pack**

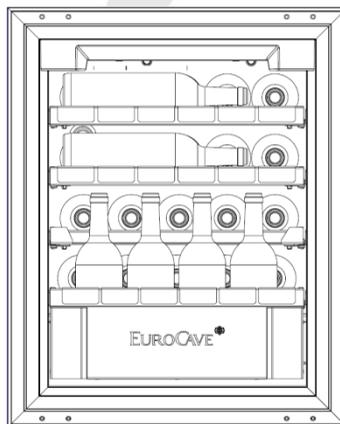


**Service  
Pack**

5 YEAR WARRANTY

## S-INSP-S

Serving cabinet

Built-in and Flush-fitted – Integrated glass door  
Multi-temperatures

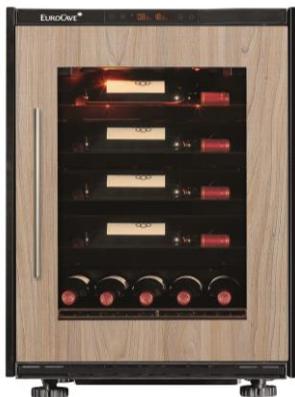

Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Half shelf  
(5 bottles)  
ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range from 5°C to 20°C (5-10°C for the lower part and 15-20°C for the upper part). Temperature setting 8-18°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Integrated glass
Gross weight packaged (kg)	61,2
Empty net weight (kg) <sup>2</sup>	52,7
Dimensions H x W x D (mm)	810-880 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

### EQUIPEMENT & ACCESSOIRES

#### EQUIPMENT

- Reversible integrated glass door with soft close and door stop
- Max thickness of the door panel : 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated glass
Energy efficiency class	A
Annual energy consumption AEC <sup>4</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> Without cladding


<sup>3</sup> Without fillers

<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Dimensions of the decorative panel

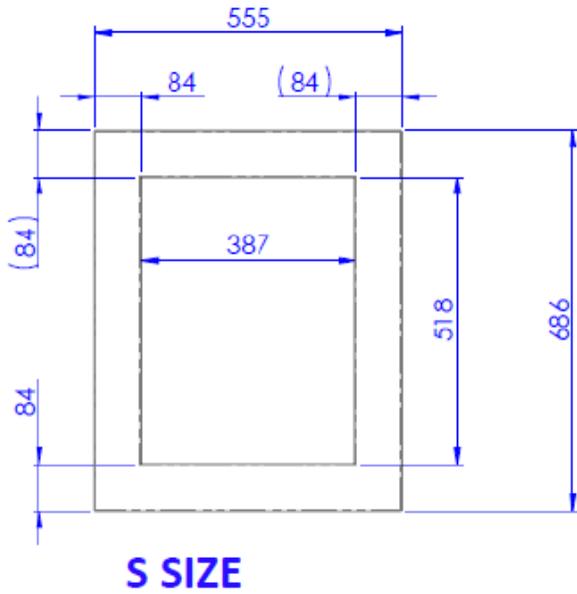

## Storage layouts




**Premium Pack**




**Service Pack**

## Installation diagrams

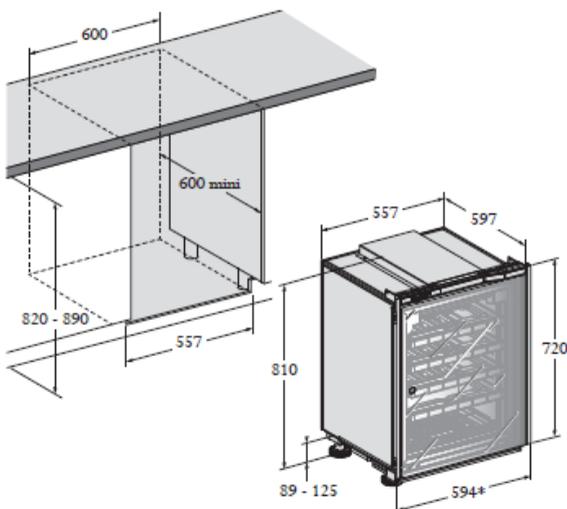

**Built-in**

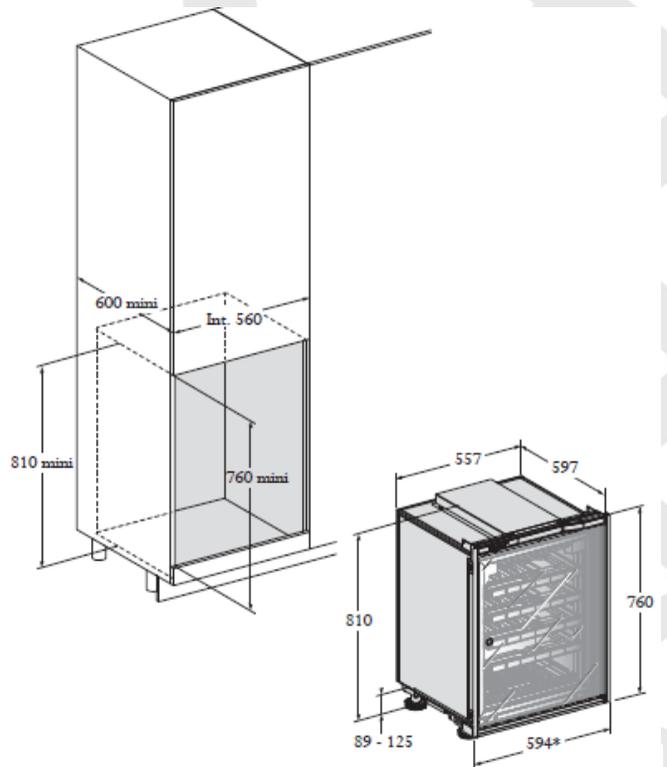

**Flush-fitted**

## S-INSP-S

### Serving cabinet

Built-in and Flush-fitted – Integrated solid door  
Multi-temperatures



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Half shelf  
(5 bottles)  
ACMSI-DEMI



#### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

#### TECHNICAL FEATURES

##### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range from 5°C to 20°C (5-10°C for the lower part and 15-20°C for the upper part). Temperature setting 8-18°C.
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Static</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

#### GENERAL FEATURES

	Integrated solid
Gross weight packaged (kg)	58,2
Empty net weight (kg) <sup>2</sup>	49,7
Dimensions H x W x D (mm)	810-880 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

#### EQUIPMENT & ACCESSORIES

##### EQUIPMENT

- Reversible integrated solid door with soft close and door stop
- Max thickness of the door panel: 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet

##### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

#### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated solid
Energy efficiency class	A+
Annual energy consumption $\Delta E_c^4$ (Kwh/year)	103
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> Without cladding

<sup>3</sup> Without fillers


<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## Dimensions of the decorative panel

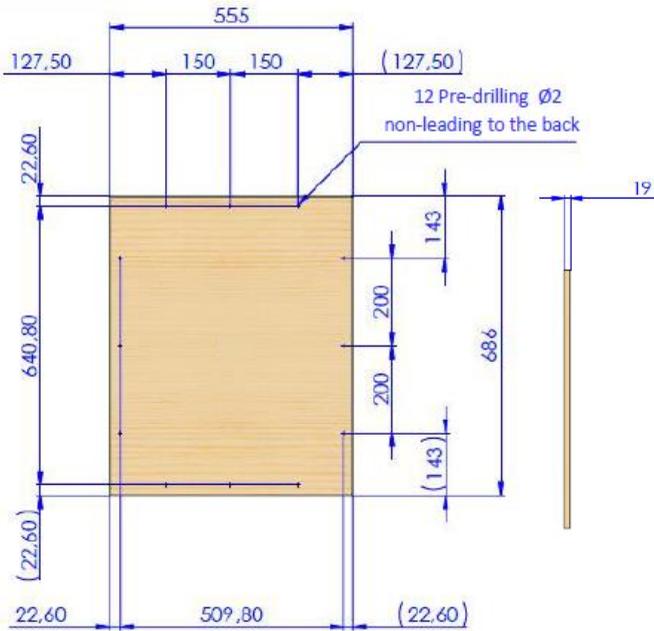


**S SIZE**

## Storage layouts




**Premium Pack**




**Service Pack**

## Installation diagrams

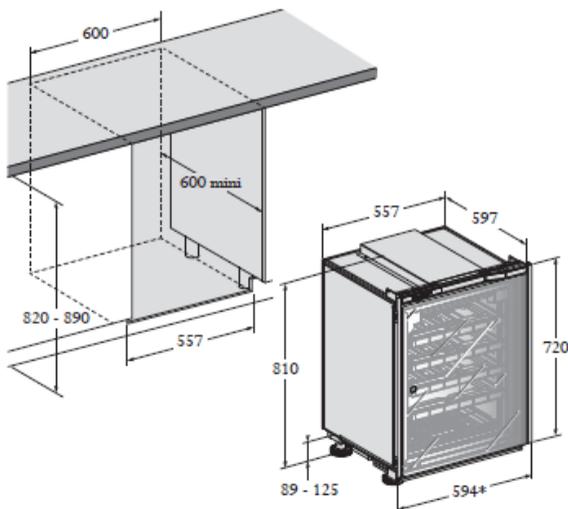

**Built-in**

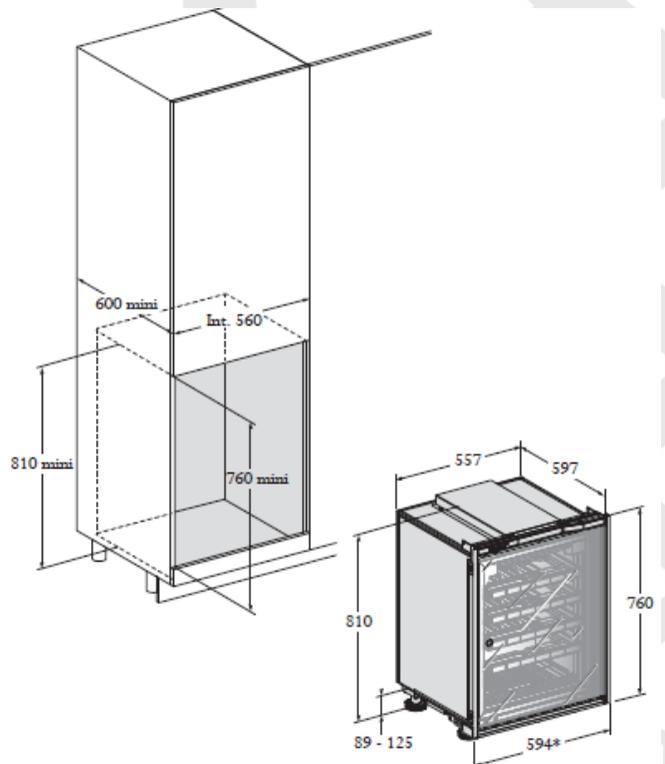

**Flush-fitted**

5 YEAR WARRANTY

## S-INSP-S

Serving cabinet

Built-in and Flush-fitted – Stainless steel door

Multi-temperatures



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Half shelf  
(5 bottles)  
ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range from 5°C to 20°C (5-10°C for the lower part and 15-20°C for the upper part). Temperature setting 8-18°C.
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static • Compressor R600a
Cords:	• CE/UK/AU/CH/US
Heat production:	• Heating element
Heat release:	• Automatic, adjustable threshold
Inner material:	• Stucco aluminum
Exterior coating material:	• HDF (High Density Fiber) melamine-faced panels
Insulation type:	• Injected polyurethane foam (59mm)

### GENERAL FEATURES

	Stainless steel door
Gross weight packaged (kg)	62,8
Empty net weight (kg)	54,3
Dimensions H x W x D (mm)	810-880 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible stainless steel door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring


### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Stainless steel
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


<sup>1</sup> Traditional Bordeaux bottles<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## Installation diagrams

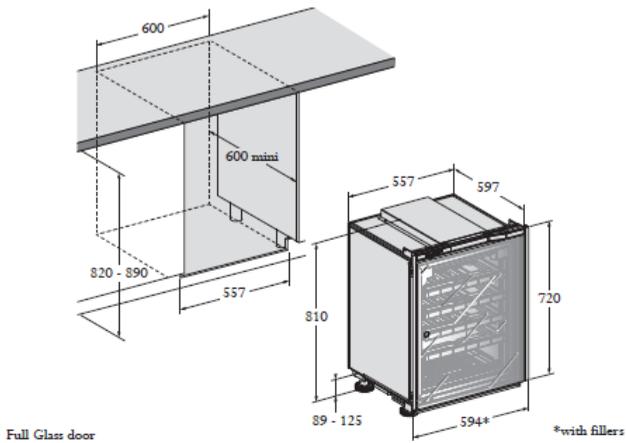


Built-in

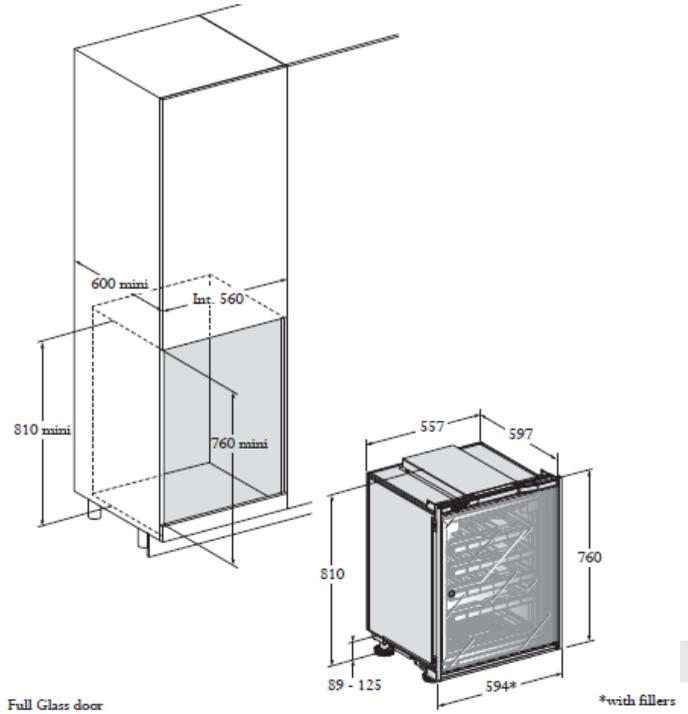


Flush-fitted

## Storage layouts

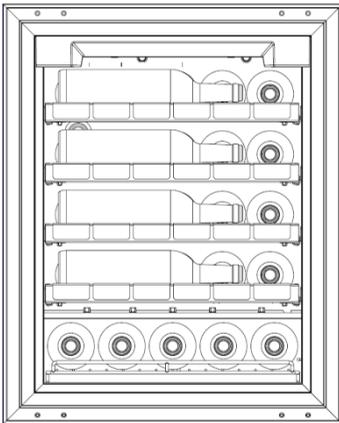


Premium  
Pack

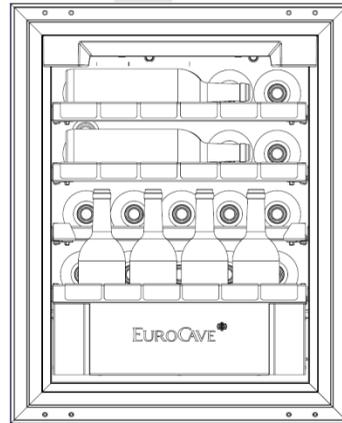

Service  
Pack


## Installation diagrams

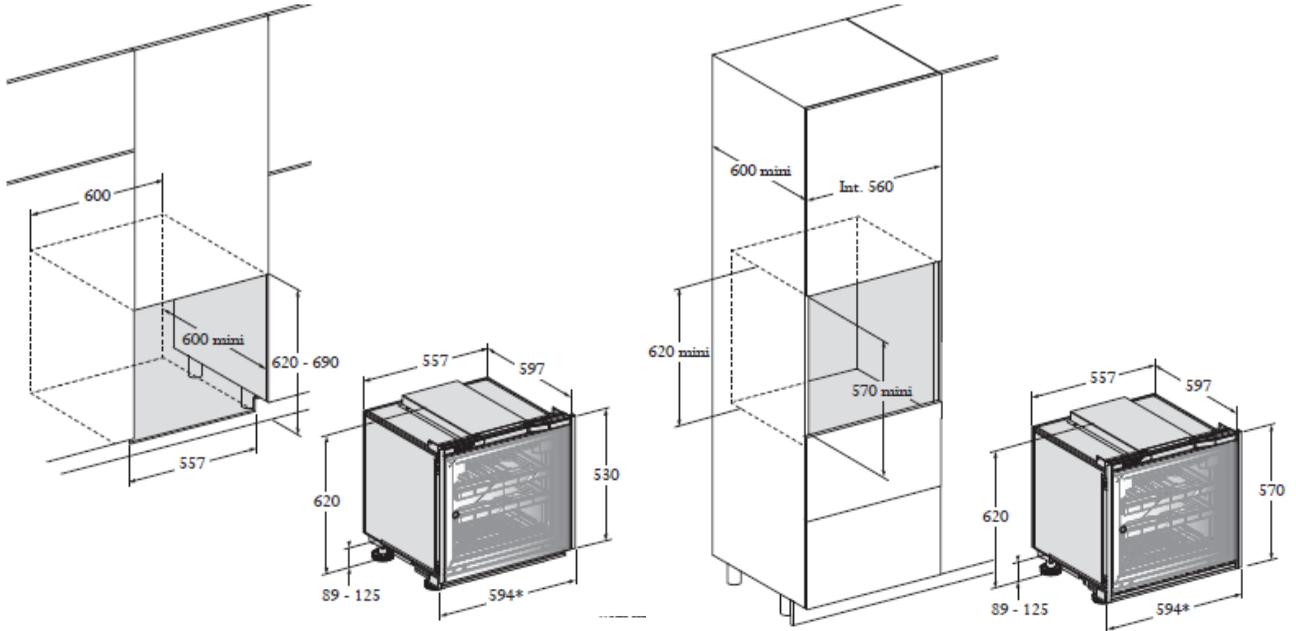

Built-in

Flush-fitted

## Storage layouts

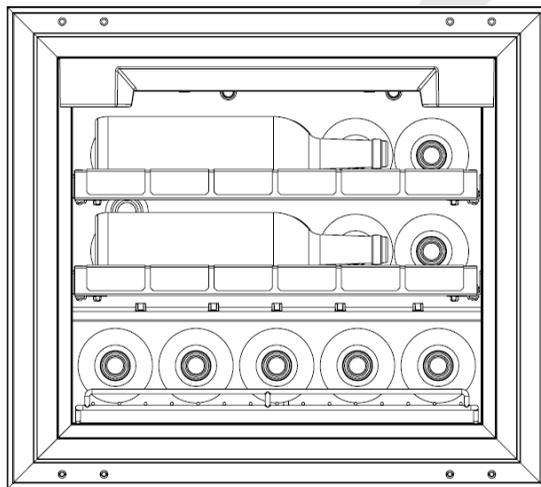

Premium  
Pack

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 6010761

## V-INSP-M

Maturing cabinet

Built-in and Flush-fitted – Full Glass door

1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
59	58	58
9 sliding shelves (+grid)	7 sliding shelves 1 half shelf 1 Wine service area	2 sliding shelves 2 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged (kg)	81,3
Empty net weight (kg)	72,4
Dimensions H x W x D (mm)	1320-1380 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1480 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	146
Useful volume (liters)	190
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)



5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 6010761

## V-INSP-M

Maturing cabinet

Built-in and Flush-fitted – Stainless steel door  
1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
59	58	58
9 sliding shelves (+grid)	7 sliding shelves 1 half shelf 1 Wine service area	2 sliding shelves 2 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Stainless steel
Gross weight packaged (kg)	82,1
Empty net weight (kg)	73,2
Dimensions H x W x D (mm)	1320-1380 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1480 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible stainless steel door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Stainless steel
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	146
Useful volume (liters)	190
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

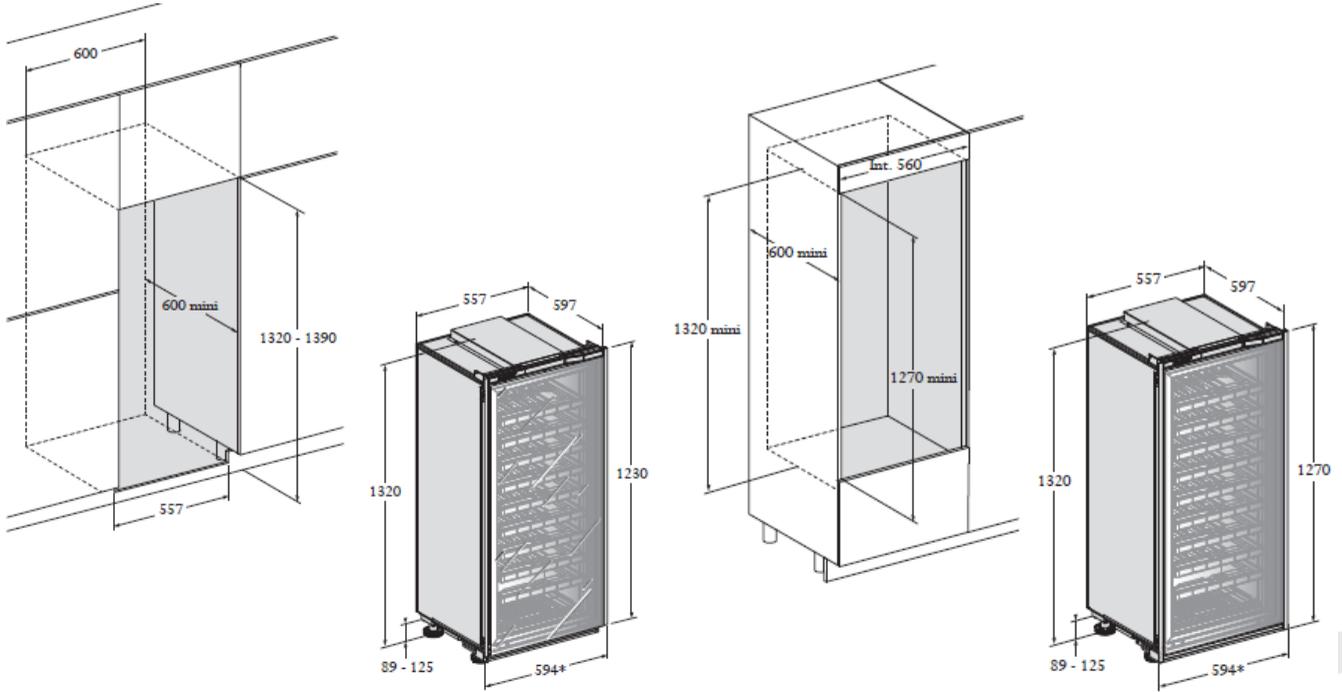


Built-in

Flush-fitted


## Storage layouts

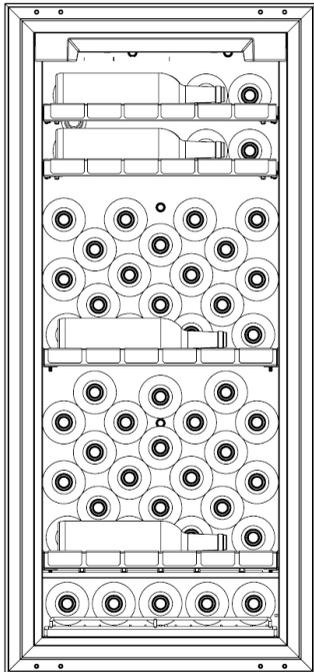

Access  
Pack

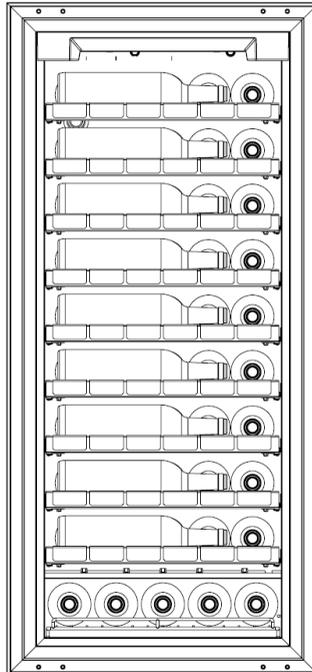

Premium  
Pack

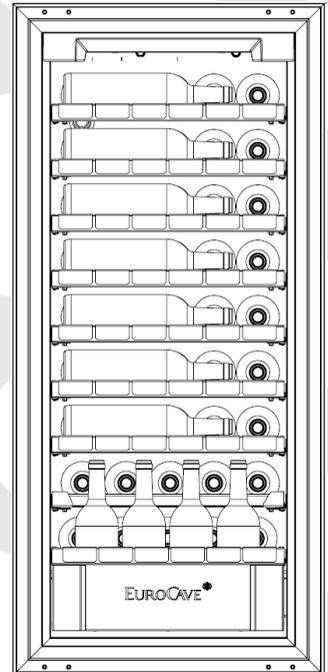

Service  
Pack

5 YEAR WARRANTY



## D-INSP-M

### Serving cabinet

#### Built-in and Flush-fitted – Full Glass door

#### 2-temperatures

ORIGINE FRANCE GARANTIE

BV Cert. 6010761



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Half shelf  
(5 bottles)  
ACMSI-DEMI

### CONFIGURATIONS

Service Pack bottle capacity <sup>1</sup>
51
4 sliding shelves 2 half shelves 1 Wine service area

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Independent temperature setting between both compartments.
  - Temperature setting range from 6 to 11°C for the chilling upper part
  - Temperature setting range from 13 to 18°C for the chamber lower part
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Air vacuum system dysfunction (visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged (kg)	87
Empty net weight (kg)	78
Dimensions H x W x D (mm)	1320-1380 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1480 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- 1 removable head for air vacuum system in the lower compartment (red wine)
- Inner lighting : atmosphere lighting with the light strip and 4 LEDs. 2 under the control panel + 2 under the separation shelf (3 options: permanent, open door, disabled)
- 2 charcoal filters
- 4 adjustable feet
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf. Wine service area + half shelves.
- 1 insulated separation shelf, fix. (ABS material). Storage area – 6 bts
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	139
Useful volume (liters)	175
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

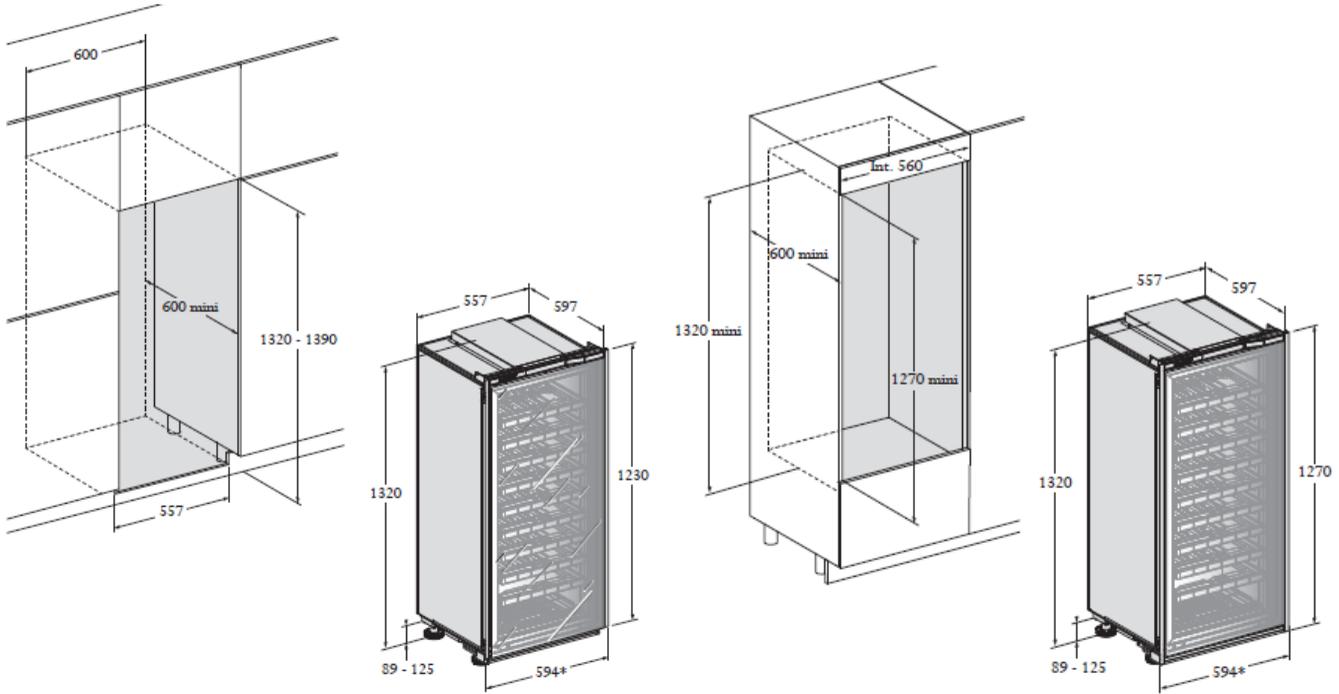

Built-in

Flush-fitted

## Storage layouts

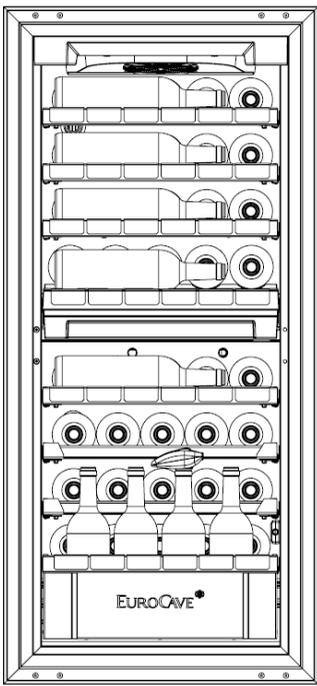

Service Pack

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 6010761

## D-INSP-M

Serving cabinet

Built-in and Flush-fitted – Stainless steel Glass door  
2-temperatures



Wine service area  
(11 bottles)  
ACMSERVW / ACMSERVB



Sliding shelf  
(6 bottles)  
ACMSIW / ACMSIB



Half shelf  
(5 bottles)  
ACMSI-DEMI

### CONFIGURATIONS

Service Pack bottle capacity <sup>1</sup>
51
4 sliding shelves 2 half shelves 1 Wine service area

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Independent temperature setting between both compartments.
  - Temperature setting range from 6 to 11°C for the chilling upper part
  - Temperature setting range from 13 to 18°C for the chamber lower part
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Air vacuum system dysfunction (visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Stainless steel Glass door
Gross weight packaged (kg)	87
Empty net weight (kg)	78
Dimensions H x W x D (mm)	1320-1380 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1480 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Stainless steel Glass door with soft close and door stop
- 1 removable head for air vacuum system in the lower compartment (red wine)
- Inner lighting : atmosphere lighting with the light strip and 4 LEDs. 2 under the control panel + 2 under the separation shelf (3 options: permanent, open door, disabled)
- 2 charcoal filters
- 4 adjustable feet
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf. Wine service area + half shelves.
- 1 insulated separation shelf, fix. (ABS material). Storage area – 6 bts
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Stainless steel
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	139
Useful volume (liters)	175
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

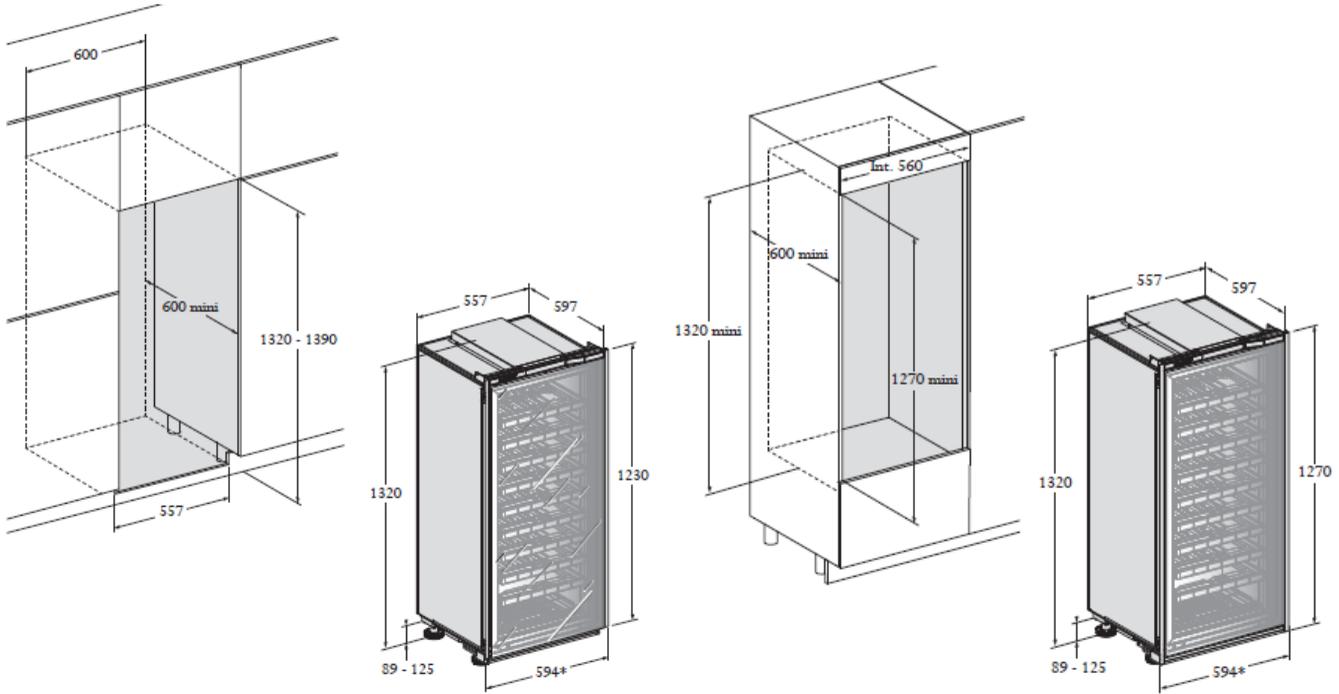

Built-in

Flush-fitted

## Storage layouts

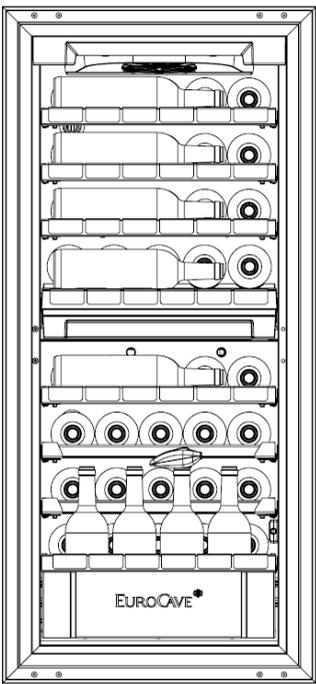

Service Pack



5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 4010761

## V-INSP-L

Maturing cabinet

Built-in and Flush-fitted – Full Glass door

1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
89	88	89
14 sliding shelves (+grid)	12 sliding shelves 1 half shelf 1 Wine service area	3 sliding shelves 3 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Full Glass door
Gross weight packaged (kg)	102,3
Empty net weight (kg)	91,3
Dimensions H x W x D (mm)	1820-1890 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Full Glass door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Full Glass
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	165
Useful volume (liters)	285
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

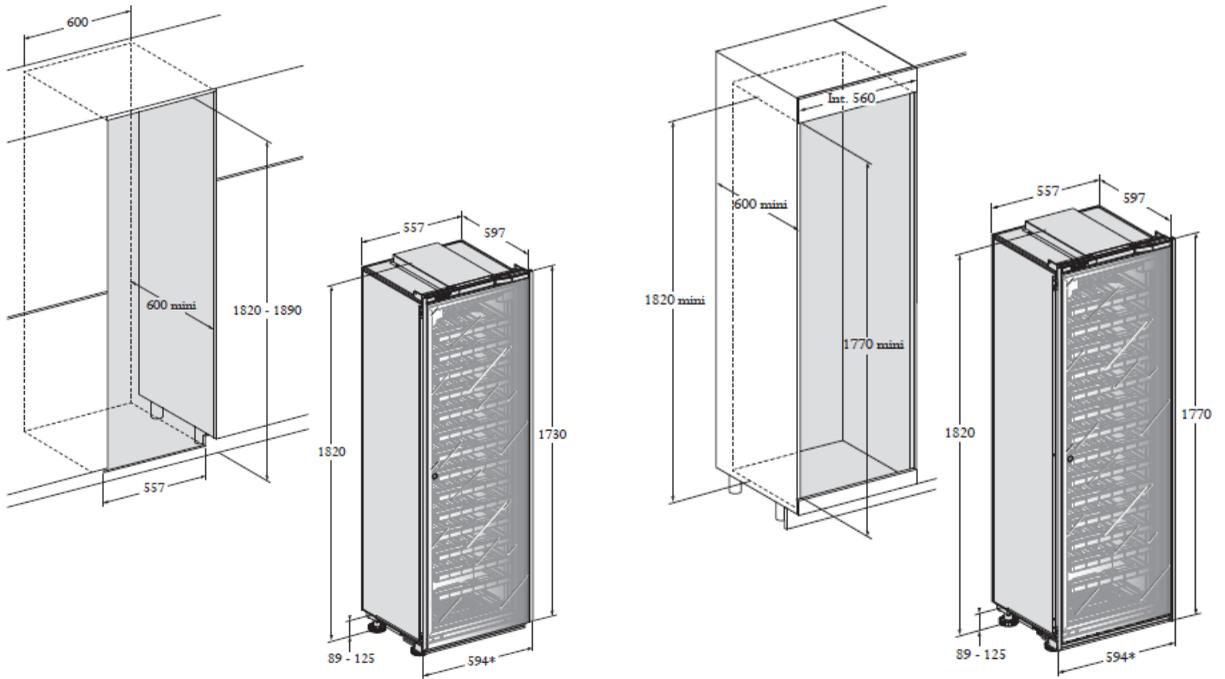


Built-in

Flush-fitted


## Storage layouts

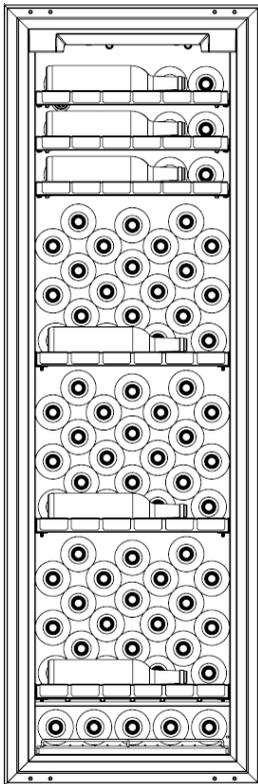

Access  
Pack

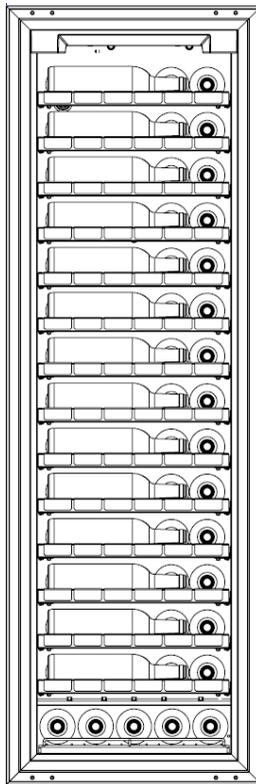

Premium  
Pack

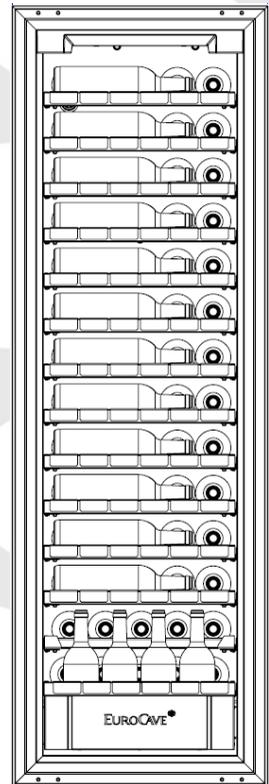

Service  
Pack

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 6010761

## V-INSP-L

Maturing cabinet

Built-in and Flush-fitted – Integrated glass door  
1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
89	88	89
14 sliding shelves (+grid)	12 sliding shelves 1 half shelf 1 Wine service area	3 sliding shelves 3 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Integrated glass
Gross weight packaged (kg)	97,8
Empty net weight (kg) <sup>2</sup>	86,8
Dimensions H x W x D (mm)	1820-1890 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	1980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPEMENT

- Reversible Integrated glass door with soft close and door stop
- Max thickness of the door panel: 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated glass
Energy efficiency class	A
Annual energy consumption Aec <sup>4</sup> (Kwh/year)	165
Useful volume (liters)	285
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles



<sup>2</sup> Without cladding

<sup>3</sup> Without fillers

<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## Dimensions of the decoration panel

## Storage layouts

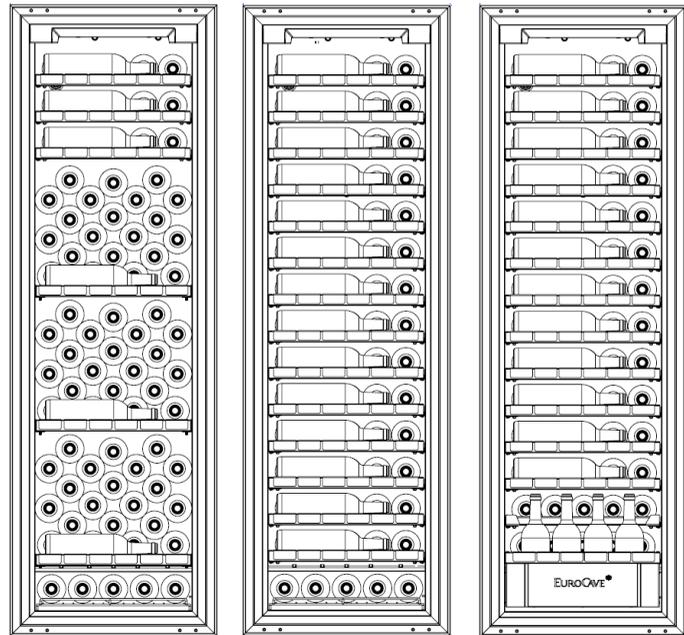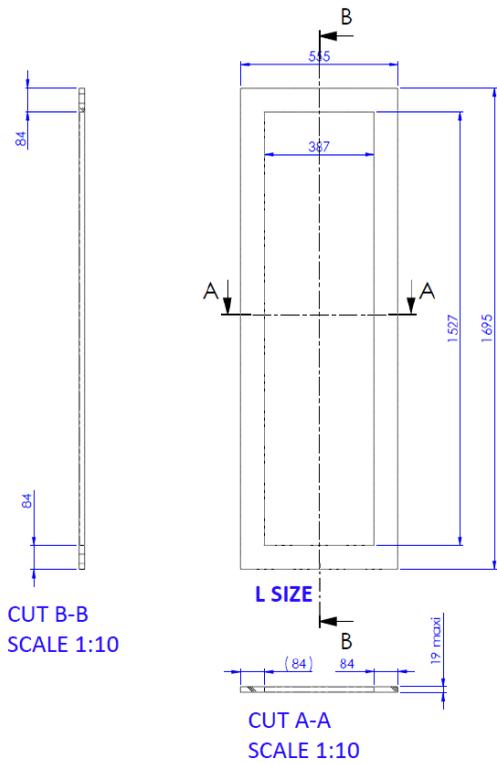


Access Pack


Premium Pack

Service Pack

## Installation diagrams

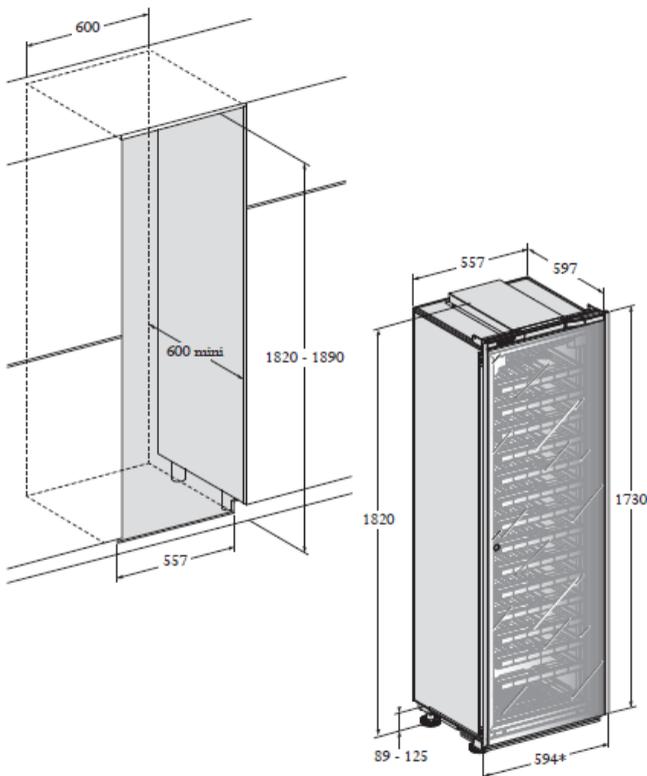

Built-in

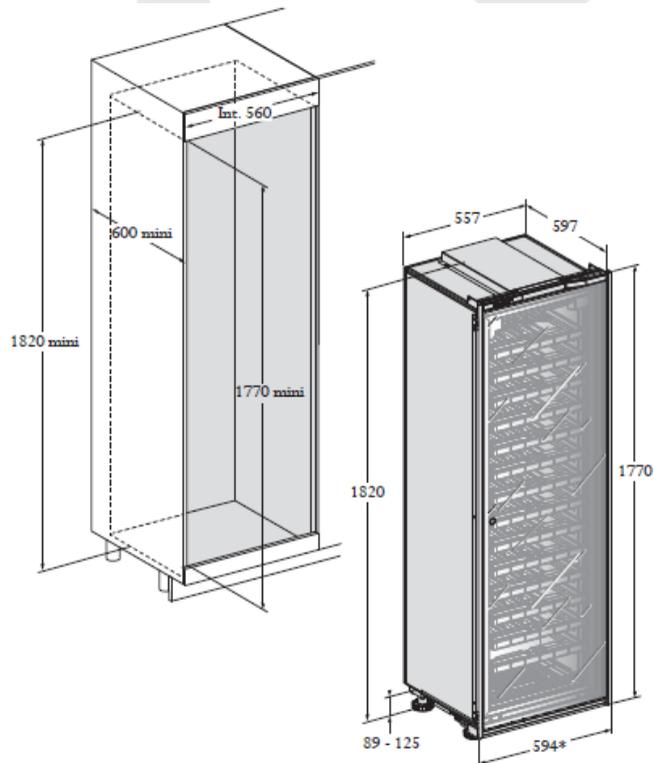

Flush-fitted

5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 4010761

## V-INSP-L

Maturing cabinet

Built-in and Flush-fitted – Integrated solid door  
1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
89	88	89
14 sliding shelves (+grid)	12 sliding shelves 1 half shelf 1 Wine service area	3 sliding shelves 3 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> <li>• Injected polyurethane foam (59mm)</li> </ul>
Insulation type:	

### GENERAL FEATURES

	Integrated solid
Gross weight packaged (kg)	90,7
Empty net weight (kg) <sup>2</sup>	79,7
Dimensions H x W x D (mm)	1820-1890 x 594 <sup>3</sup> x 597
Dimensions packaged H x W x D (mm)	1980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible integrated solid door with soft close and door stop
- Max thickness of the door panel: 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open /close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated solid
Energy efficiency class	A
Annual energy consumption AEC <sup>4</sup> (Kwh/year)	143
Useful volume (liters)	285
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> Without cladding

<sup>3</sup> Without fillers

<sup>4</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)



5 YEAR WARRANTY



ORIGINE FRANCE GARANTIE  
BY Cert. 6010761

## V-INSP-L

Maturing cabinet

Built-in and Flush-fitted – Stainless steel door  
1-temperature



Sliding shelf  
(6 bottles)

ACMSIW / ACMSIB



Wine service area  
(11 bottles)

ACMSERVW / ACMSERVB



Storage shelf  
(up to 22 bottles)

AXIHW / AXIHB



Half shelf  
(5 bottles)

ACMSI-DEMI

### CONFIGURATIONS

Premium Pack bottle capacity <sup>1</sup>	Service Pack bottle capacity <sup>1</sup>	Access Pack bottle capacity <sup>1</sup>
89	88	89
14 sliding shelves (+grid)	12 sliding shelves 1 half shelf 1 Wine service area	3 sliding shelves 3 storage shelves (+grid)

### TECHNICAL FEATURES

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range between 5°C and 20°C
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Hygrometry dysfunction (visual)
  - Sensor fault (sound and visual)
  - Hygrometry limit (visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost
- Frost protection thermostat (double protection)

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	<ul style="list-style-type: none"> <li>• Ventilated</li> <li>• Compressor R600a</li> </ul>
Cords:	<ul style="list-style-type: none"> <li>• CE/UK/AU/CH/US</li> </ul>
Heat production:	<ul style="list-style-type: none"> <li>• Heating element</li> </ul>
Heat release:	<ul style="list-style-type: none"> <li>• Automatic, adjustable threshold</li> </ul>
Inner material:	<ul style="list-style-type: none"> <li>• Stucco aluminum</li> </ul>
Exterior coating material:	<ul style="list-style-type: none"> <li>• HDF (High Density Fiber) melamine-faced panels</li> </ul>
Insulation type:	<ul style="list-style-type: none"> <li>• Injected polyurethane foam (59mm)</li> </ul>

### GENERAL FEATURES

	Stainless steel
Gross weight packaged (kg)	103,2
Empty net weight (kg)	92,2
Dimensions H x W x D (mm)	1820-1890 x 594 <sup>2</sup> x 597
Dimensions packaged H x W x D (mm)	1980 x 645 x 630

### EQUIPMENT & ACCESSORIES

#### EQUIPMENT

- Reversible Stainless steel door with soft close and door stop
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Humidity cartridge
- Lock

#### ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

### ENERGY EFFICIENCY & CONSUMPTION


Cords	230V-50Hz (R600a)
Type of door	Stainless steel
Energy efficiency class	A
Annual energy consumption AEC <sup>3</sup> (Kwh/year)	165
Useful volume (liters)	285
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

<sup>1</sup> Traditional Bordeaux bottles

<sup>2</sup> With fillers

<sup>3</sup> Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)


## Installation diagrams

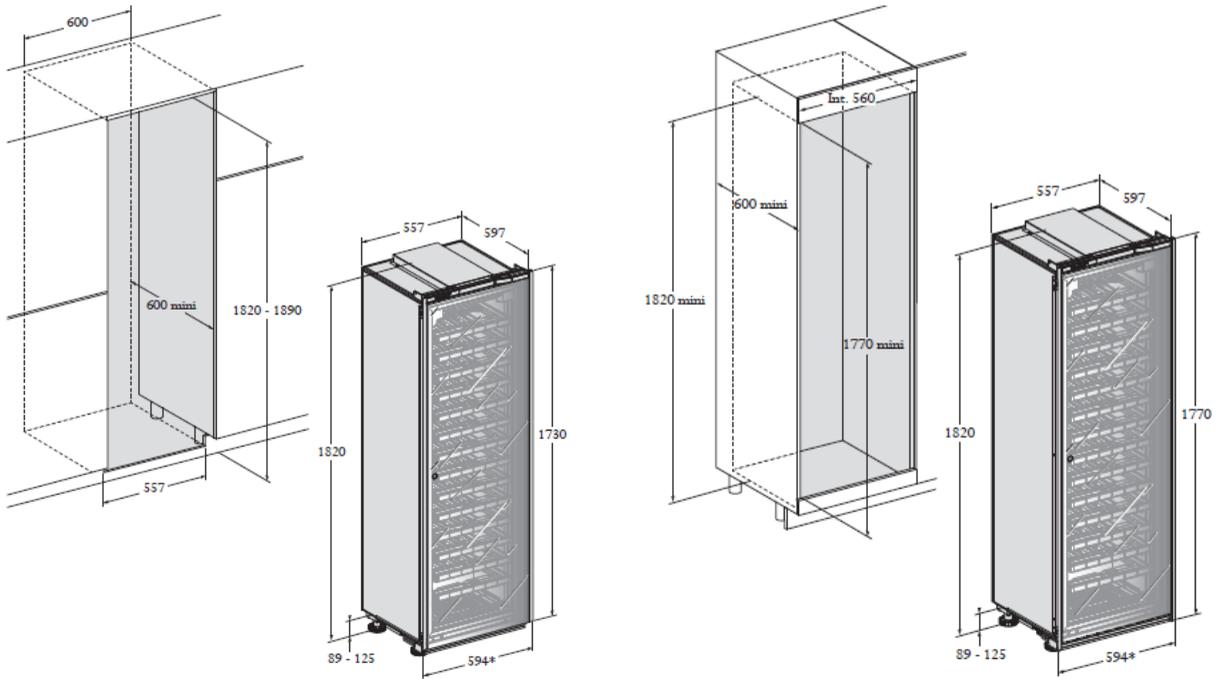


Built-in

Flush-fitted


## Storage layouts

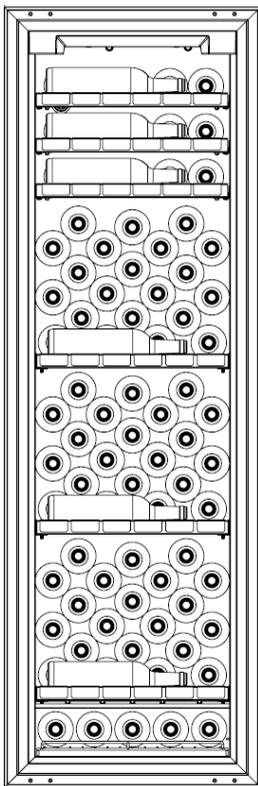

Access  
Pack

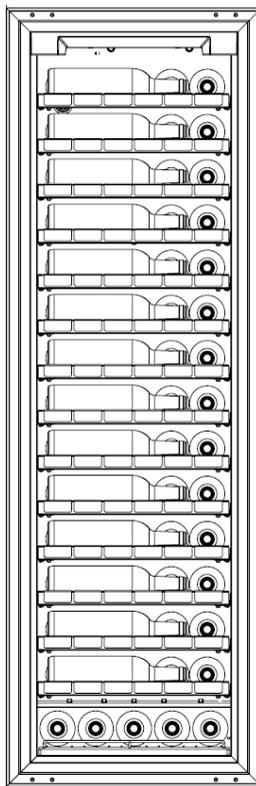

Premium  
Pack

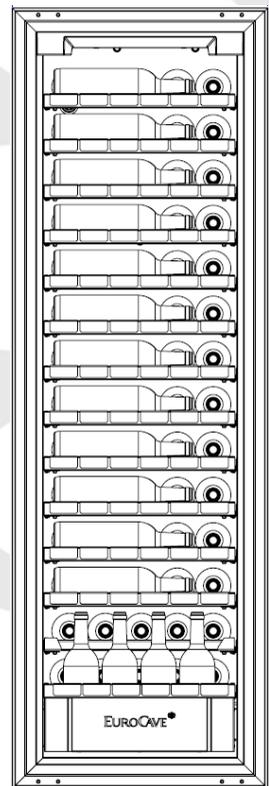

Service  
Pack





INSTALLATION  
DIAGRAMS


### XS size Ref.V-INSP-XS

#### "Built-in" version


Built-in between 2 furnitures. Installed on the floor.

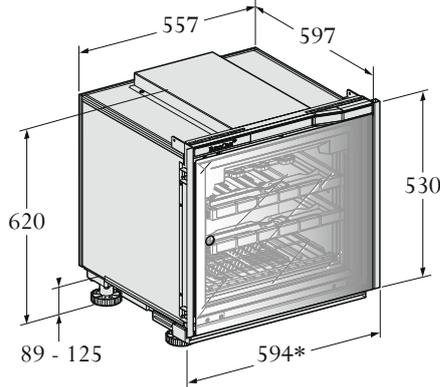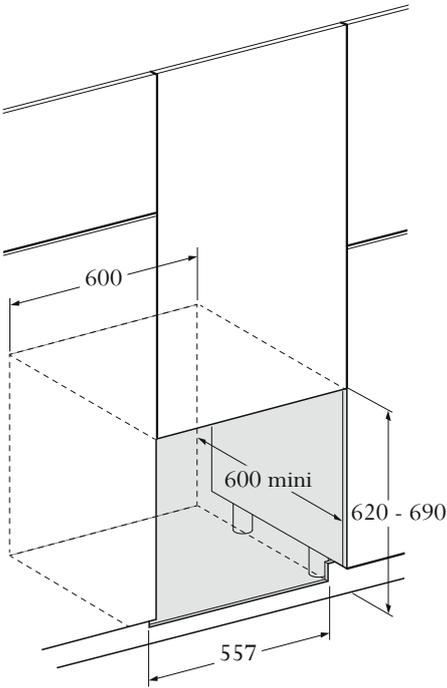

Side view

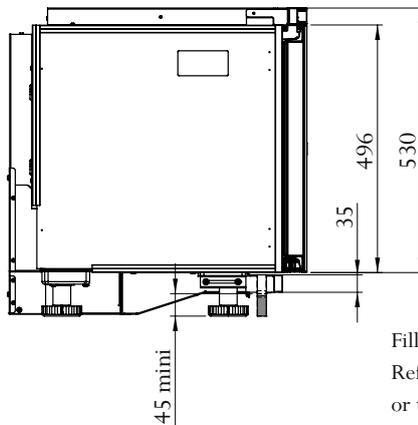

Front view

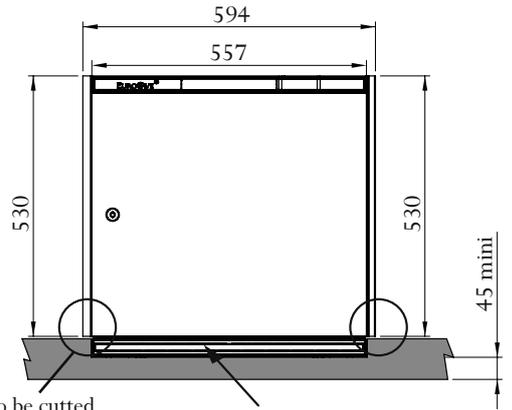

Fillers to be cutted.  
Refer to the quickstart  
or the IFU.



Lower strip - Air outlet  
Adjustable in depth

Full Glass door


\* with fillers

#### "Flush-fitted" version


Fitted in a kitchen furniture.

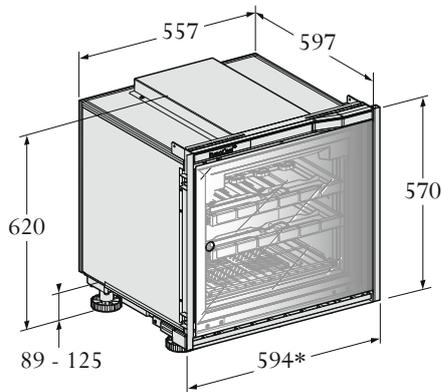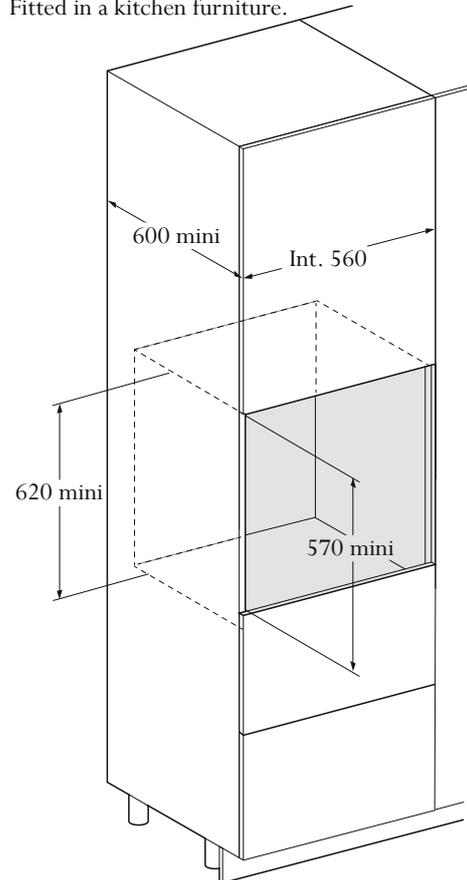

Side view

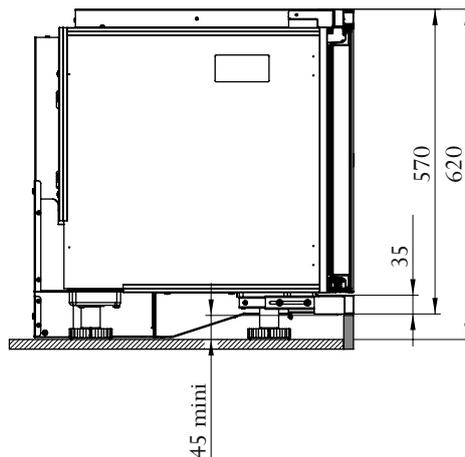

Front view

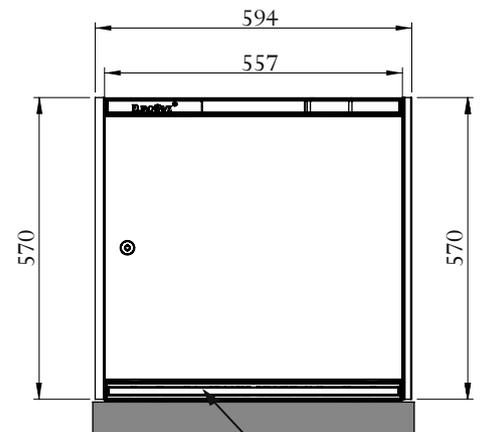

Lower strip - Air outlet  
Adjustable in depth


Full Glass door

\* with fillers

### S size Ref. V-INSP-S / S-INSP-S

#### "Built-in" version



Built-in between 2 furnitures. Installed on the floor.

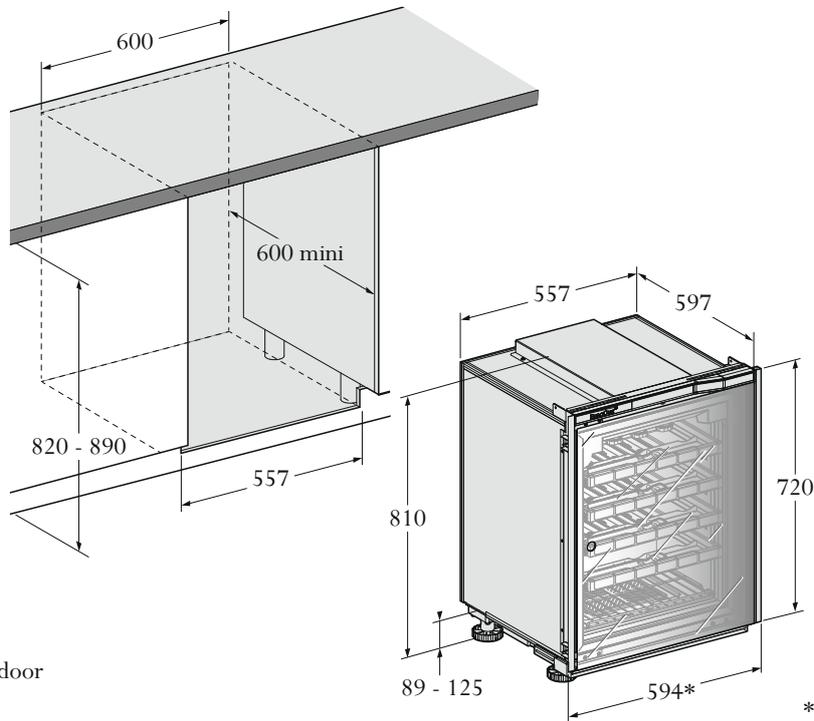


Full Glass door

Side view


Front view

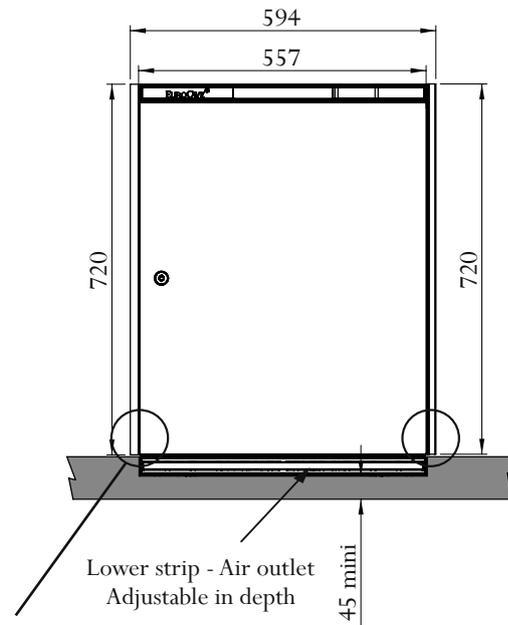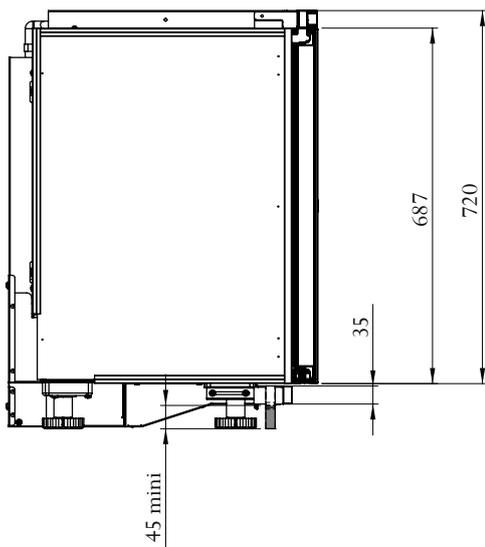


Fillers to be cutted.  
Refer to the quickstart  
or the IFU.

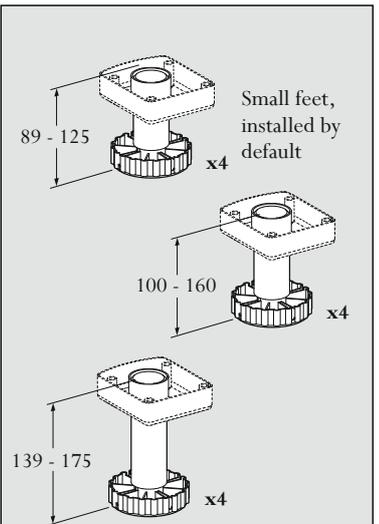


3 heights of feet,  
delivered with the wine cabinet



Technical solid door  
(thickness of the decor panel = 20mm max.)



Stainless steel glass door




Technical glass door  
(thickness of the decor panel = 20mm max.)


### S size Ref.V-INSP-S / S-INSP-S

#### "Flush-fitted" version

Fitted in a kitchen furniture.

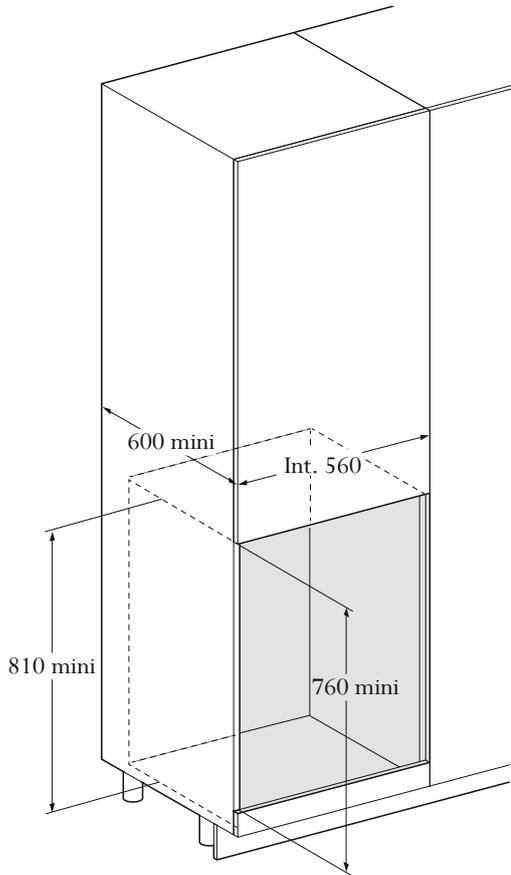


Full Glass door

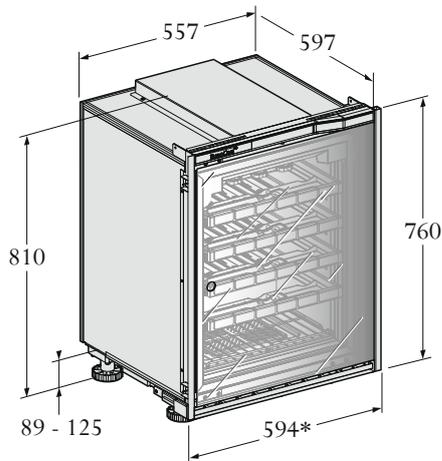


\* with fillers



#### Side view

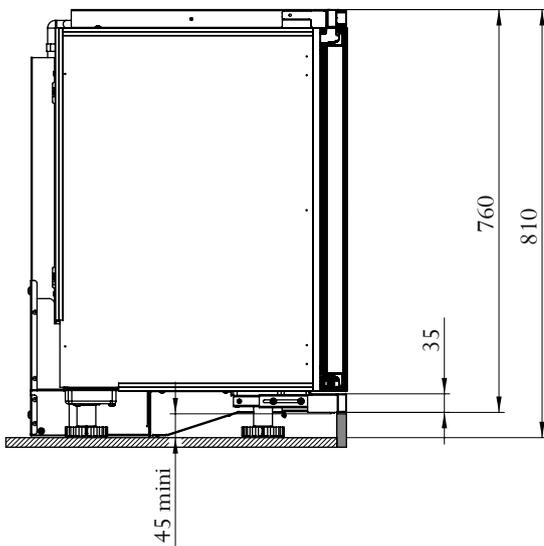


#### Front view

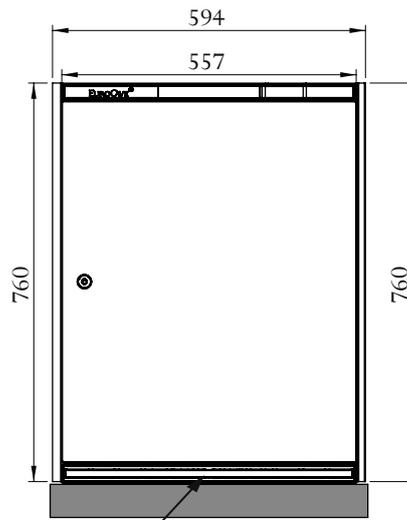


Lower strip - Air outlet  
Adjustable in depth

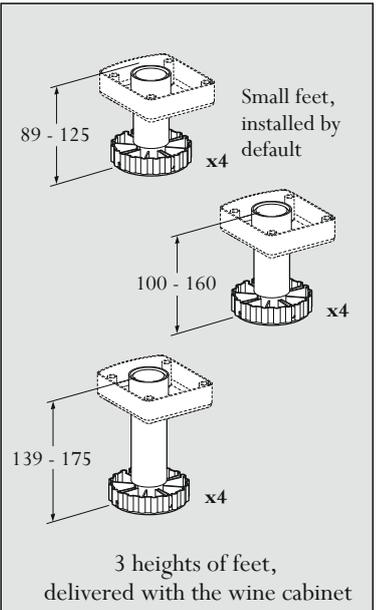

Technical solid door  
(thickness of the decor panel = 20mm max.)  
Do not use the fillers. Refer on p.8.



Stainless steel glass door







Technical glass door  
(thickness of the decor panel = 20mm max.)  
Do not use the fillers. Refer on p.8.

### M size Ref.V-INSP-M / D-INSP-M

#### "Built-in" version



Built-in between 2 furnitures. Installed on the floor.

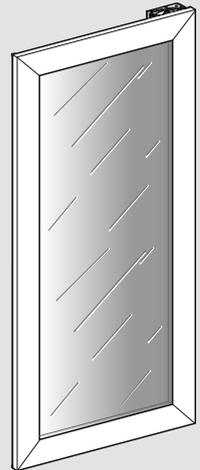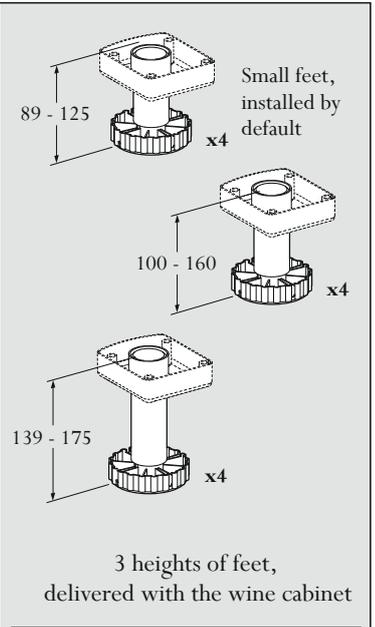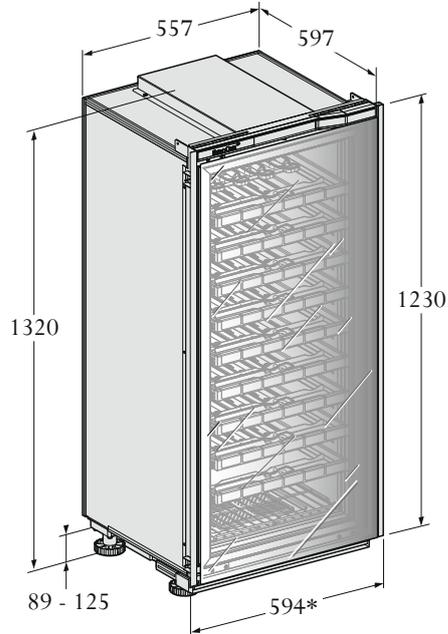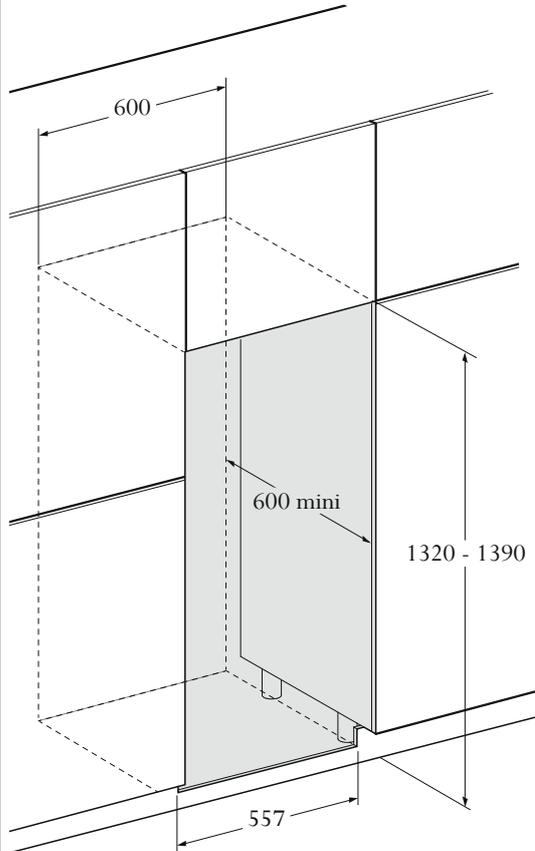

Stainless steel glass door

Side view

Front view

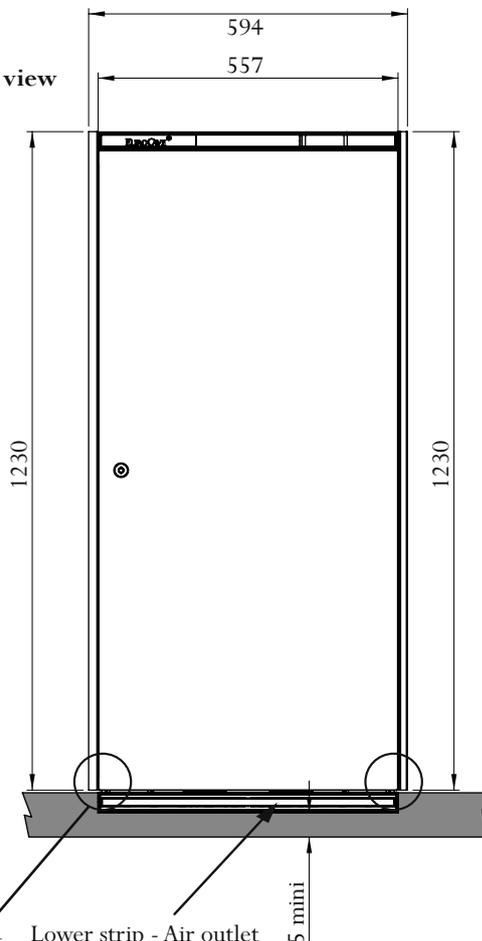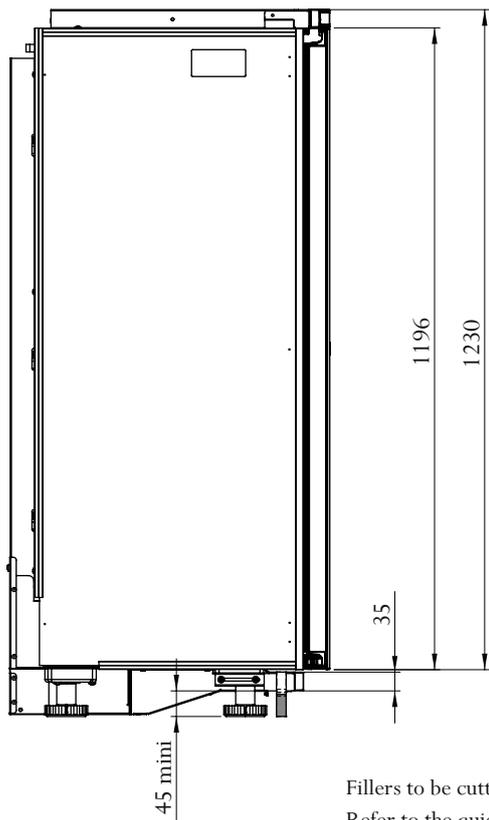

Full Glass door

Fillers to be cutted.

Refer to the quickstart or the IFU.




Lower strip - Air outlet  
Adjustable in depth

\* with fillers

### M size Ref. V-INSP-M / D-INSP-M

#### "Flush-fitted" version

Fitted in a kitchen furniture.

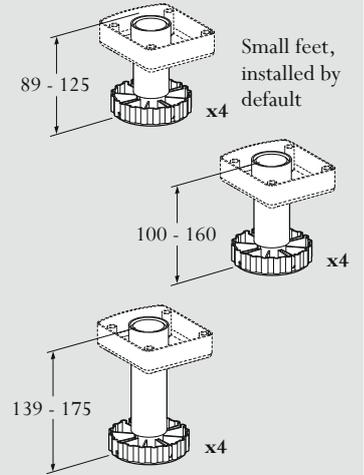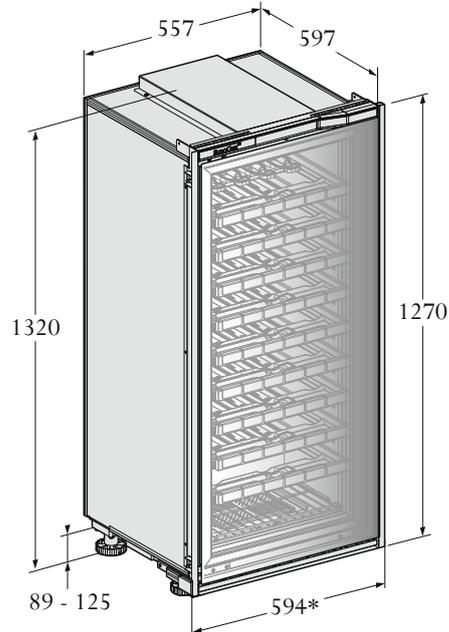
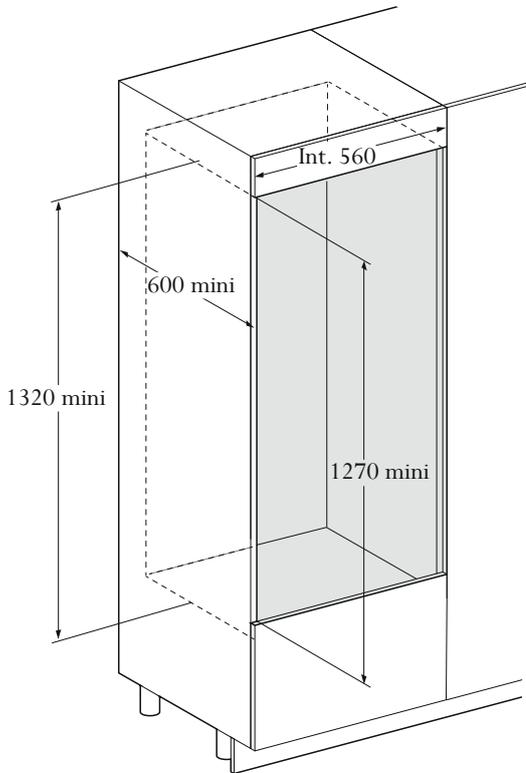


Small feet,  
installed by  
default


3 heights of feet,  
delivered with the wine cabinet

Side view

Front view

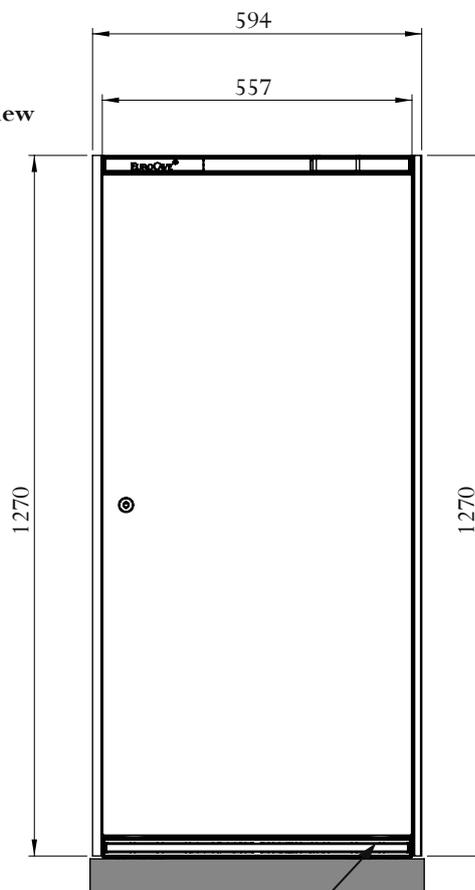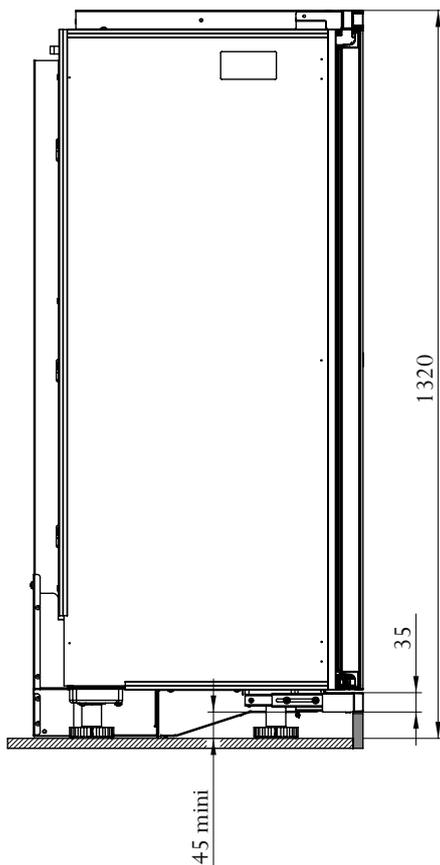

Lower strip - Air outlet  
Adjustable in depth

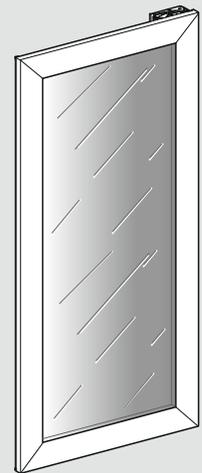

Stainless steel glass door







Full Glass door

\* with fillers


### L size Ref. V-INSP-L

#### "Built-in" version

Built-in between 2 furnitures. Installed on the floor.

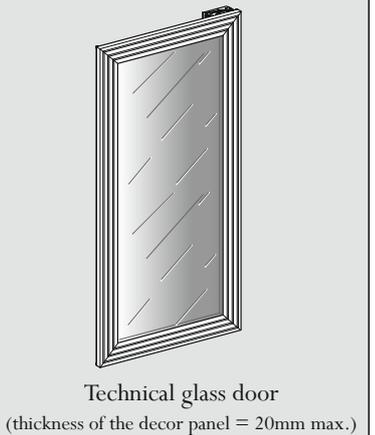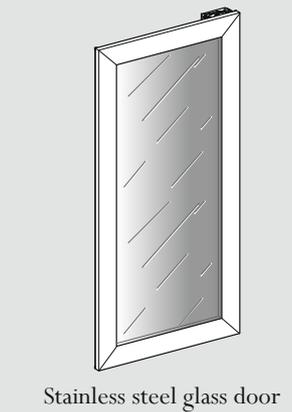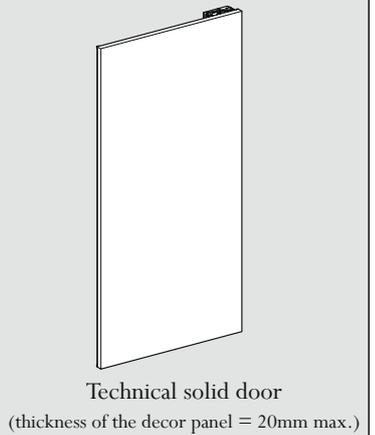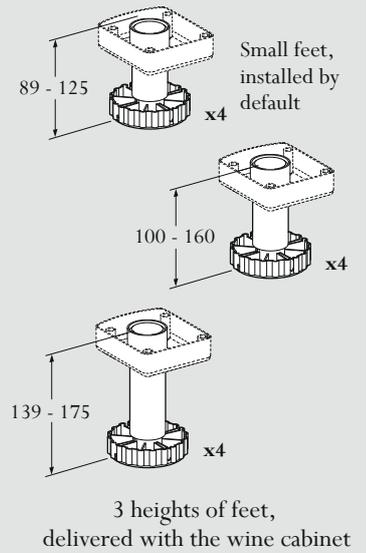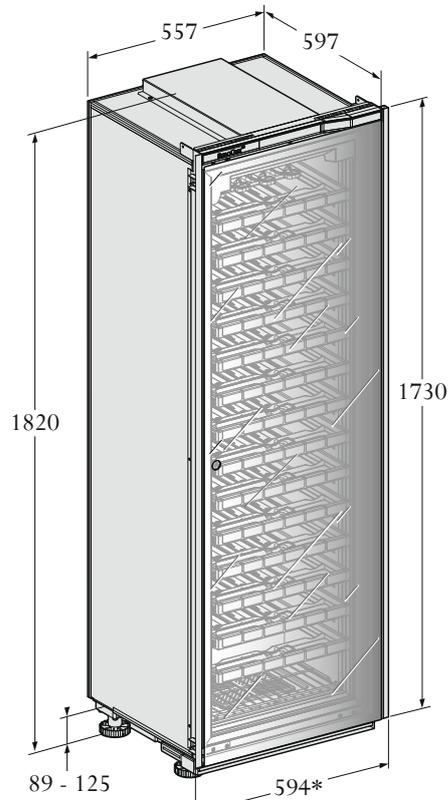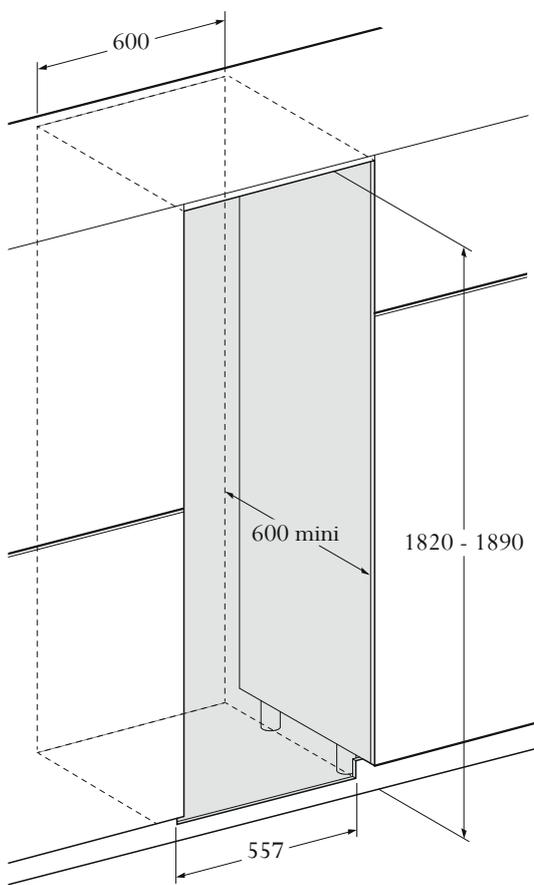


Side view

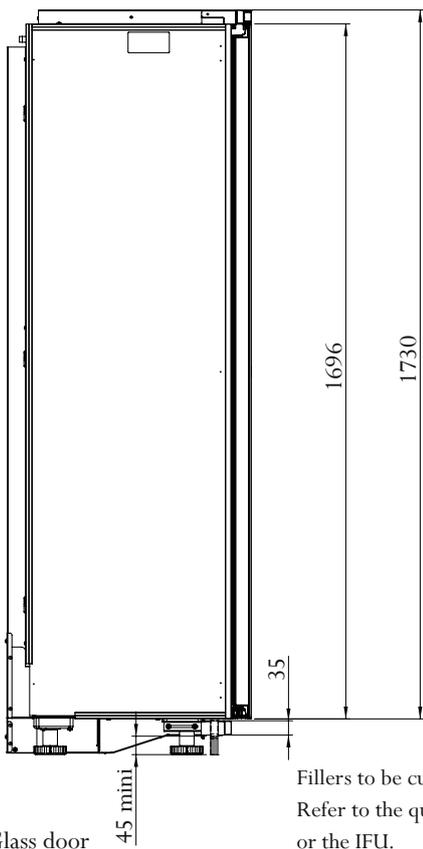



Full Glass door

Front view

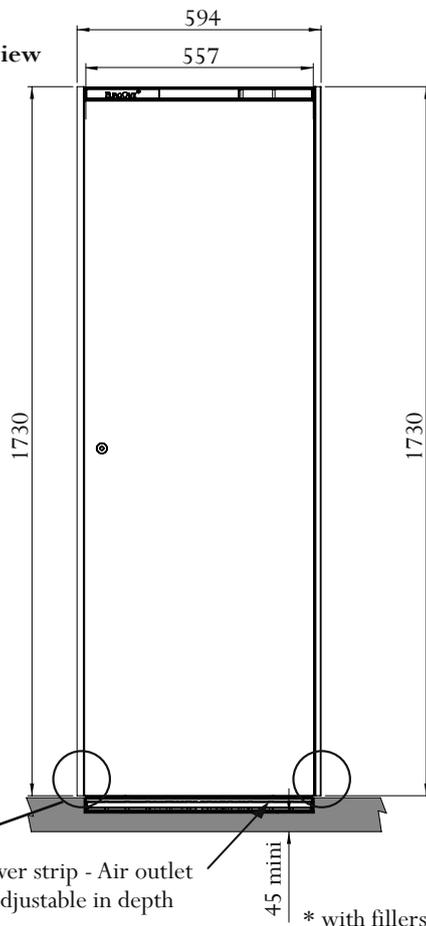


### L size Ref. V-INSP-L "Flush-fitted" version

Fitted in a kitchen furniture.

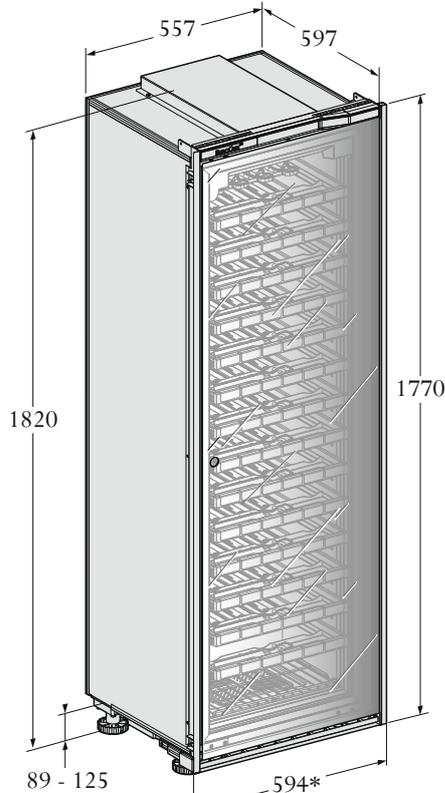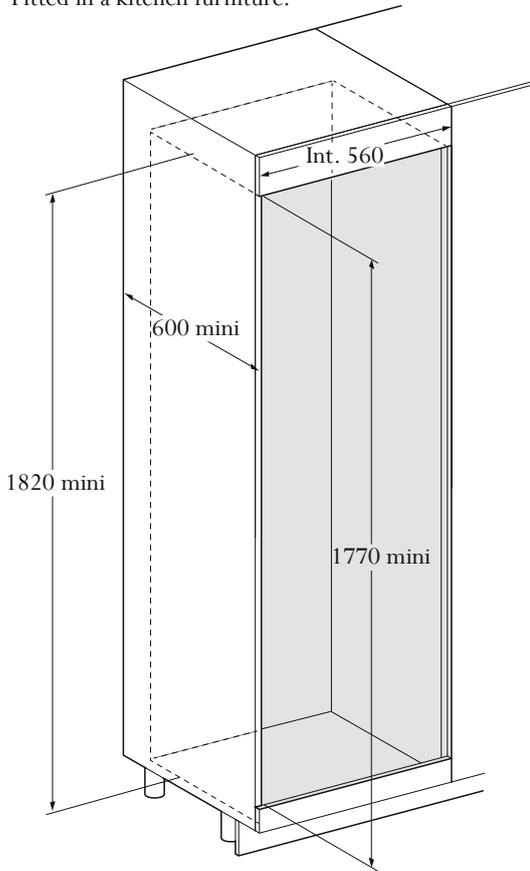


Side view

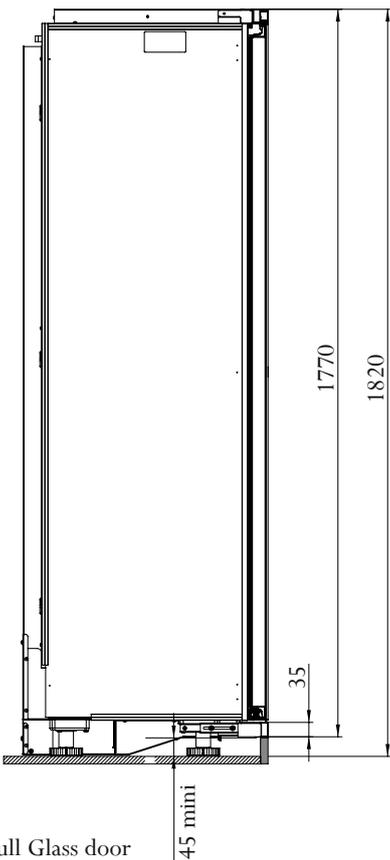


Full Glass door

Front view

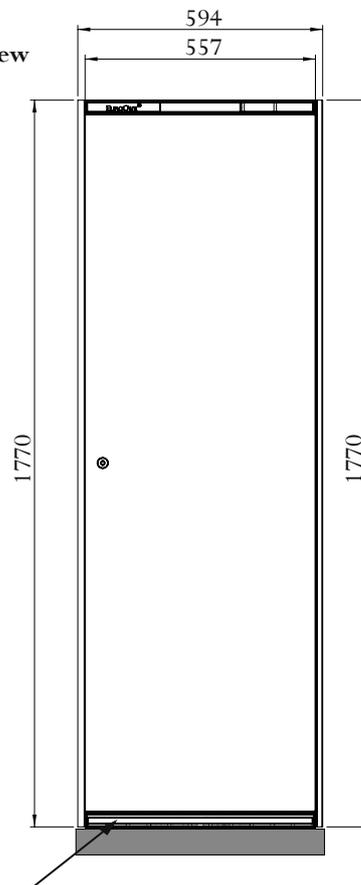

Lower strip - Air outlet  
Adjustable in depth


\* with fillers

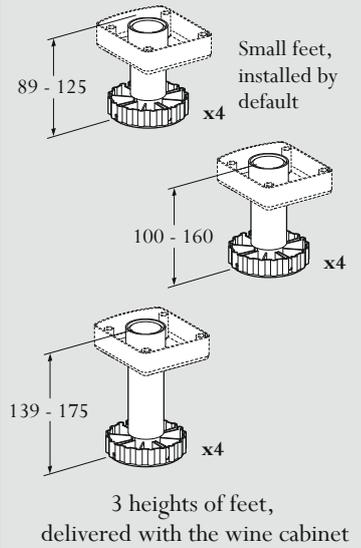


Technical solid door

(thickness of the decor panel = 20mm max.)

Do not use the fillers. Refer on p.8.

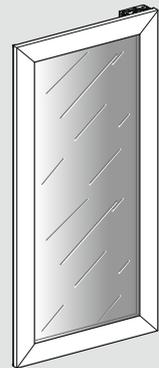

Stainless steel glass door

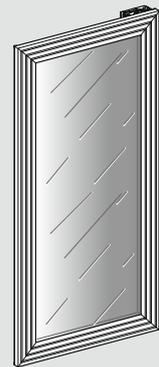

Technical glass door


(thickness of the decor panel = 20mm max.)

Do not use the fillers. Refer on p.8.


### S & L models

Focus on the "flush-fitted" version, with technical glass door or technical solid door.

#### S model :

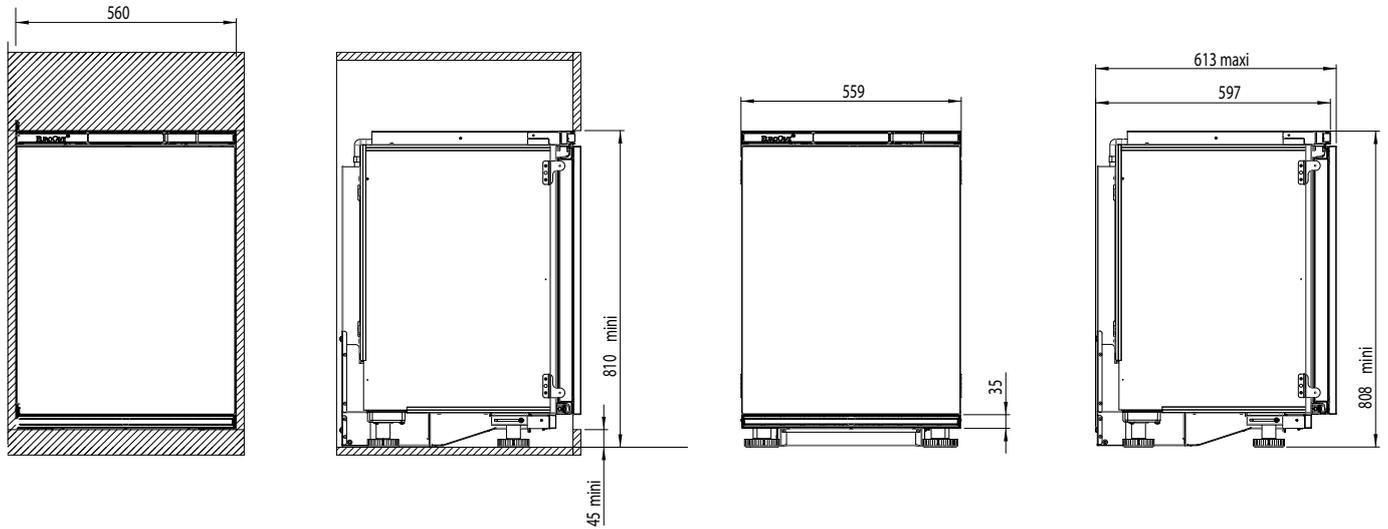



#### L model:


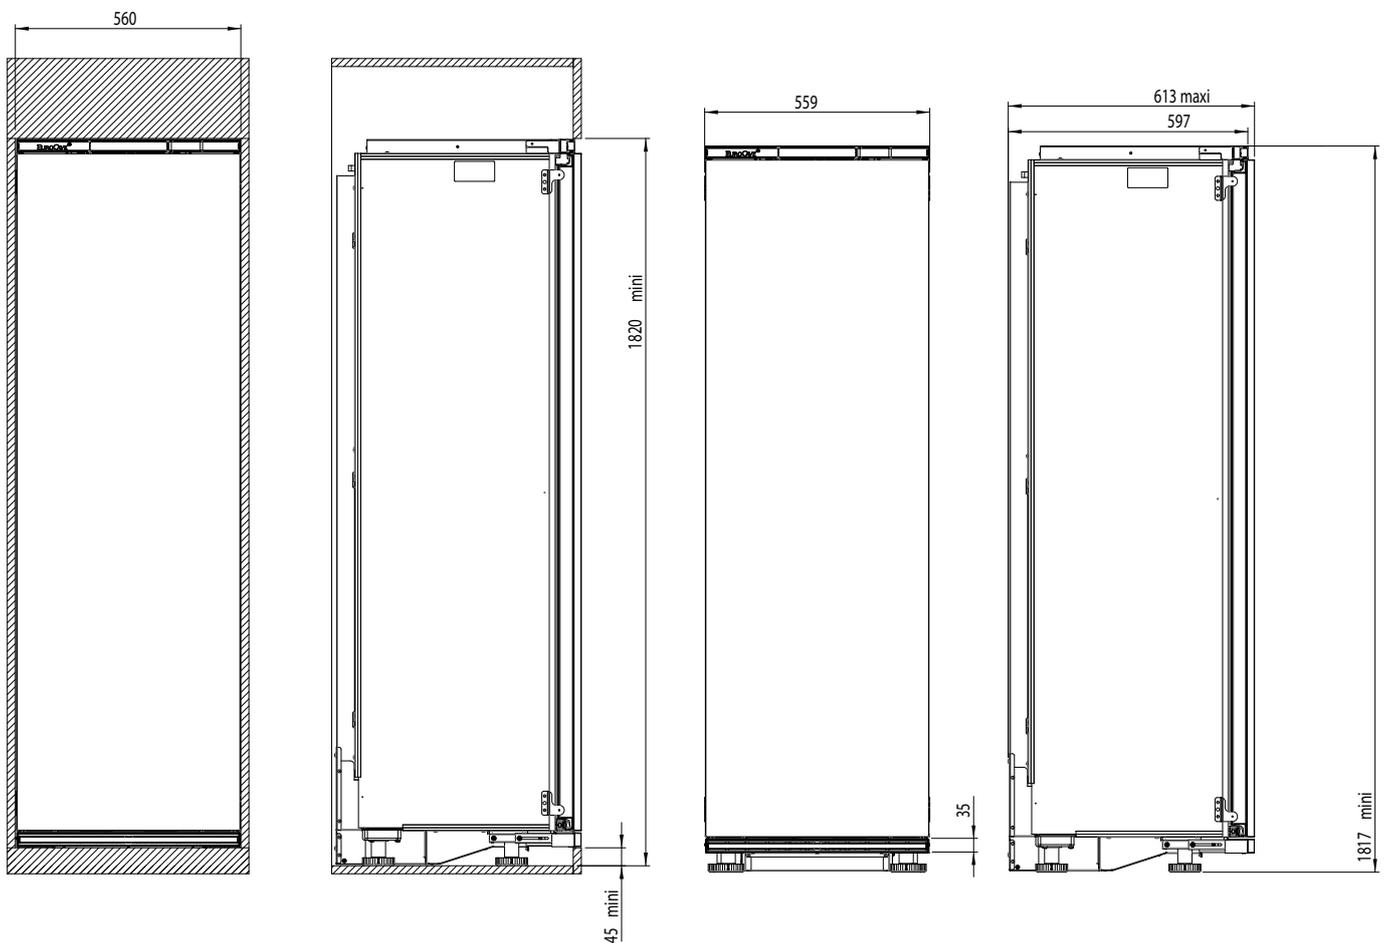








QUICKSTART







built-in installation

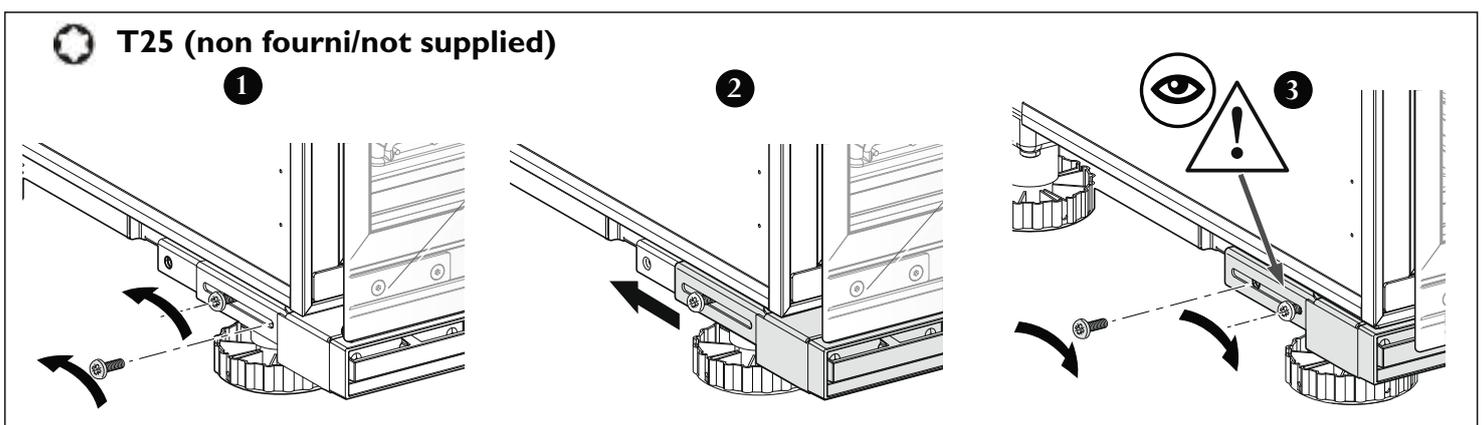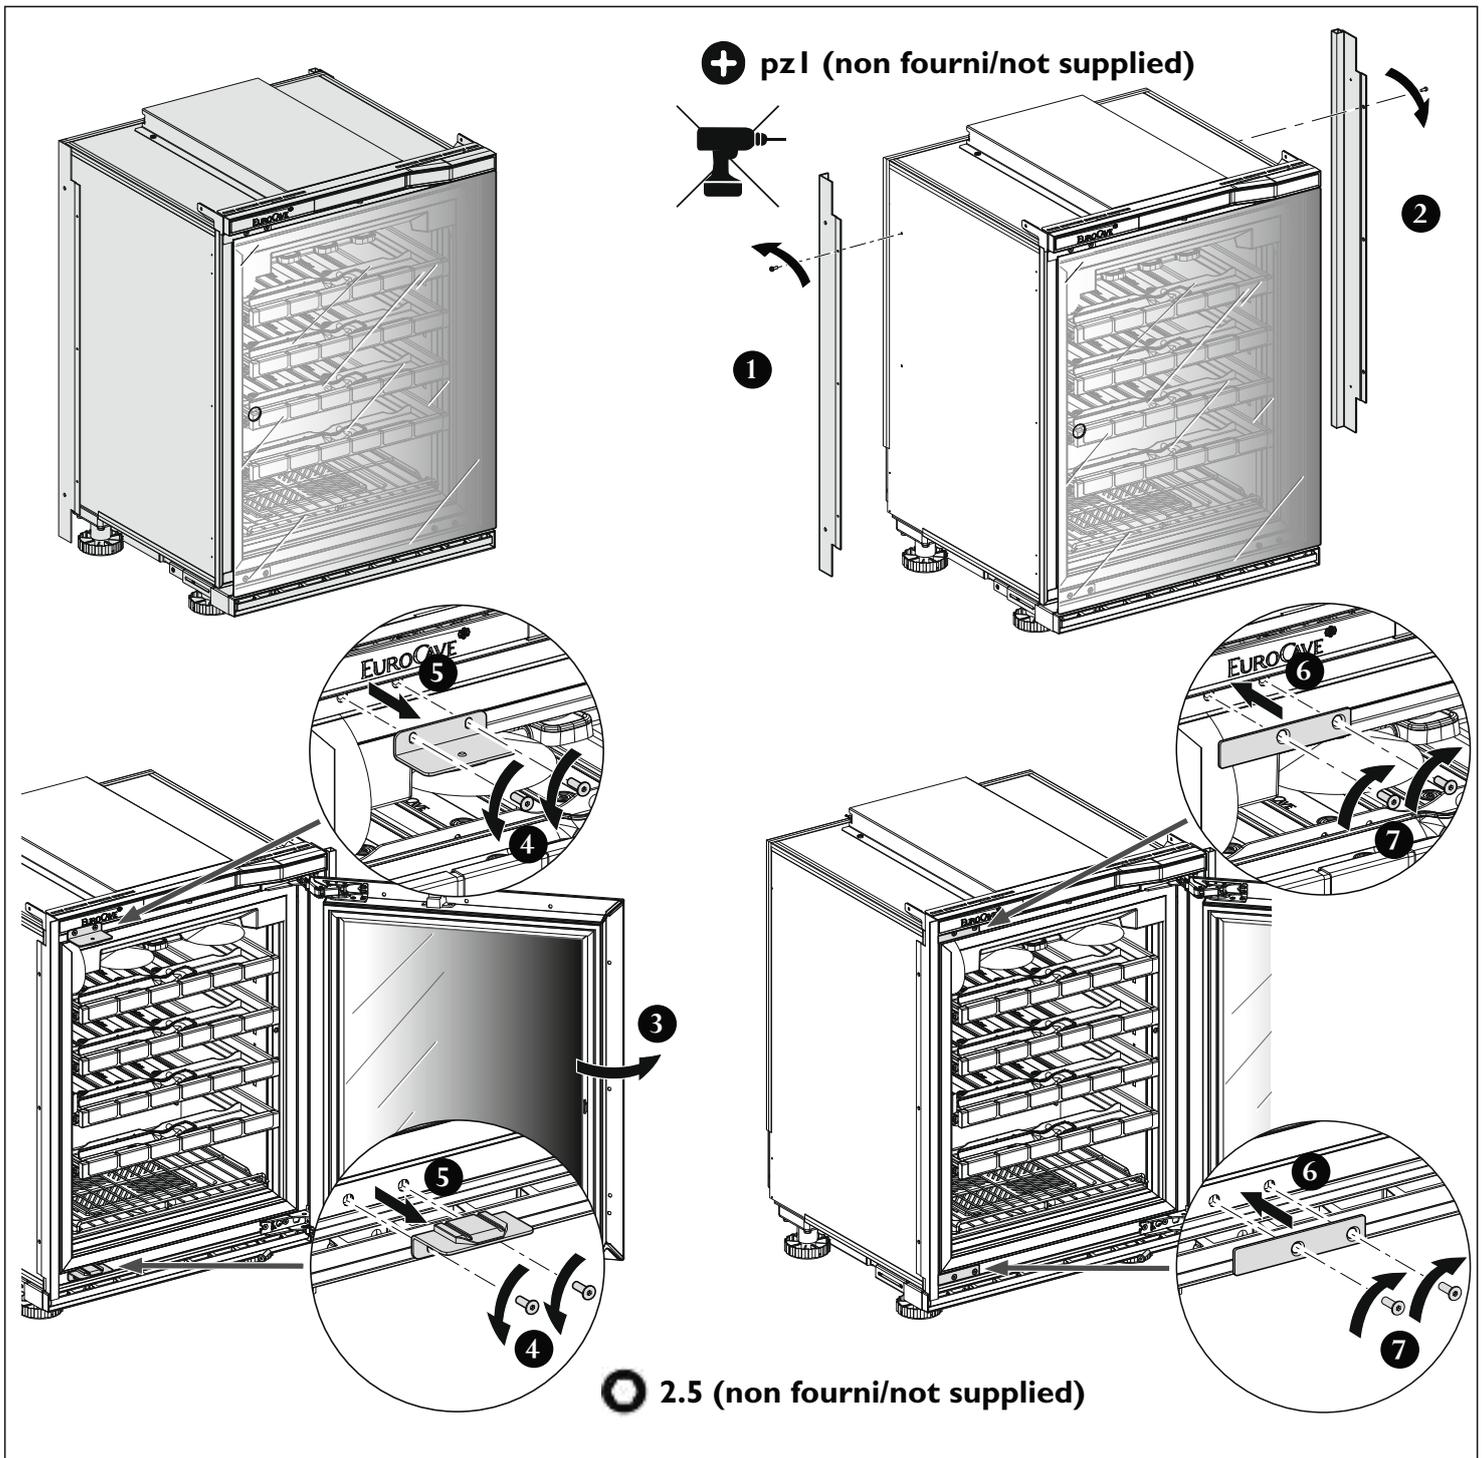

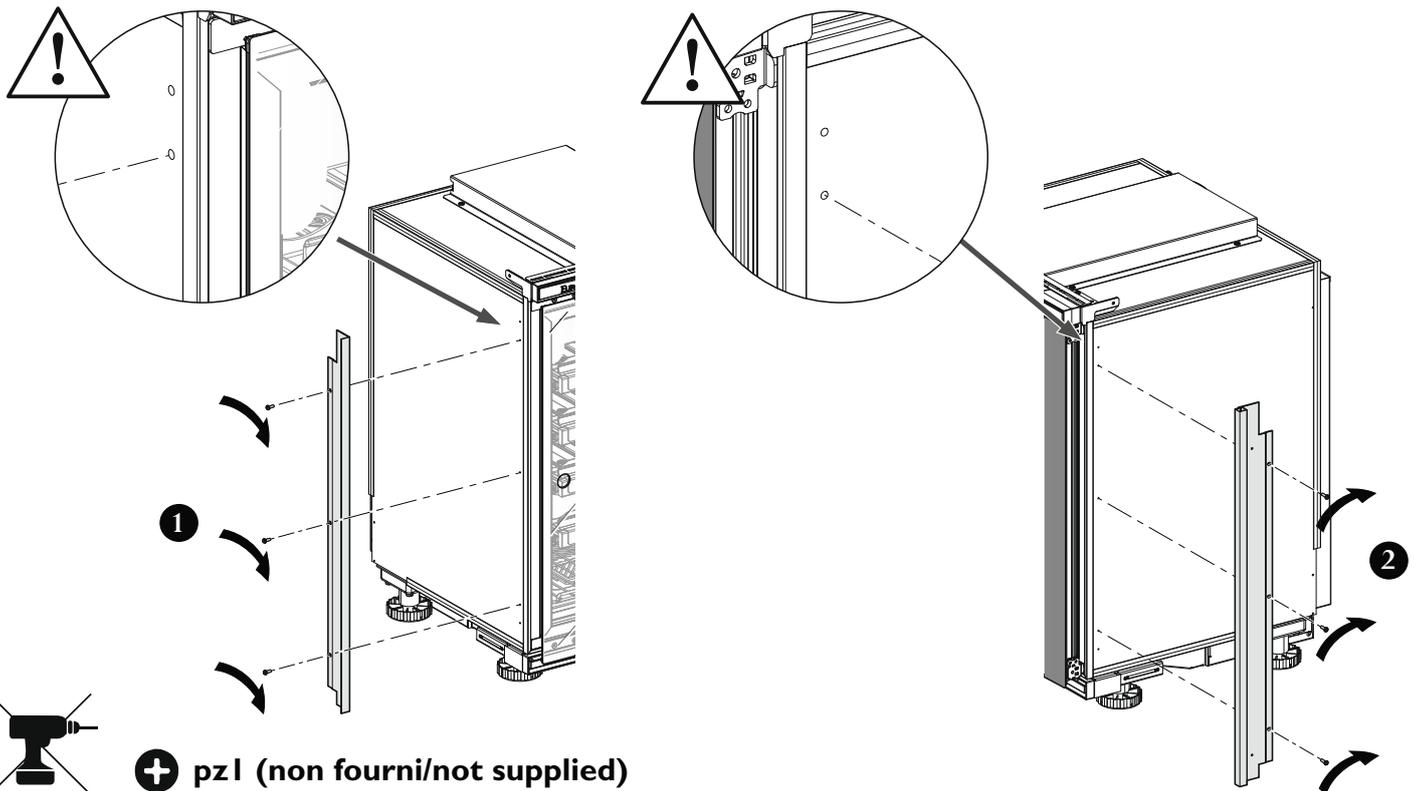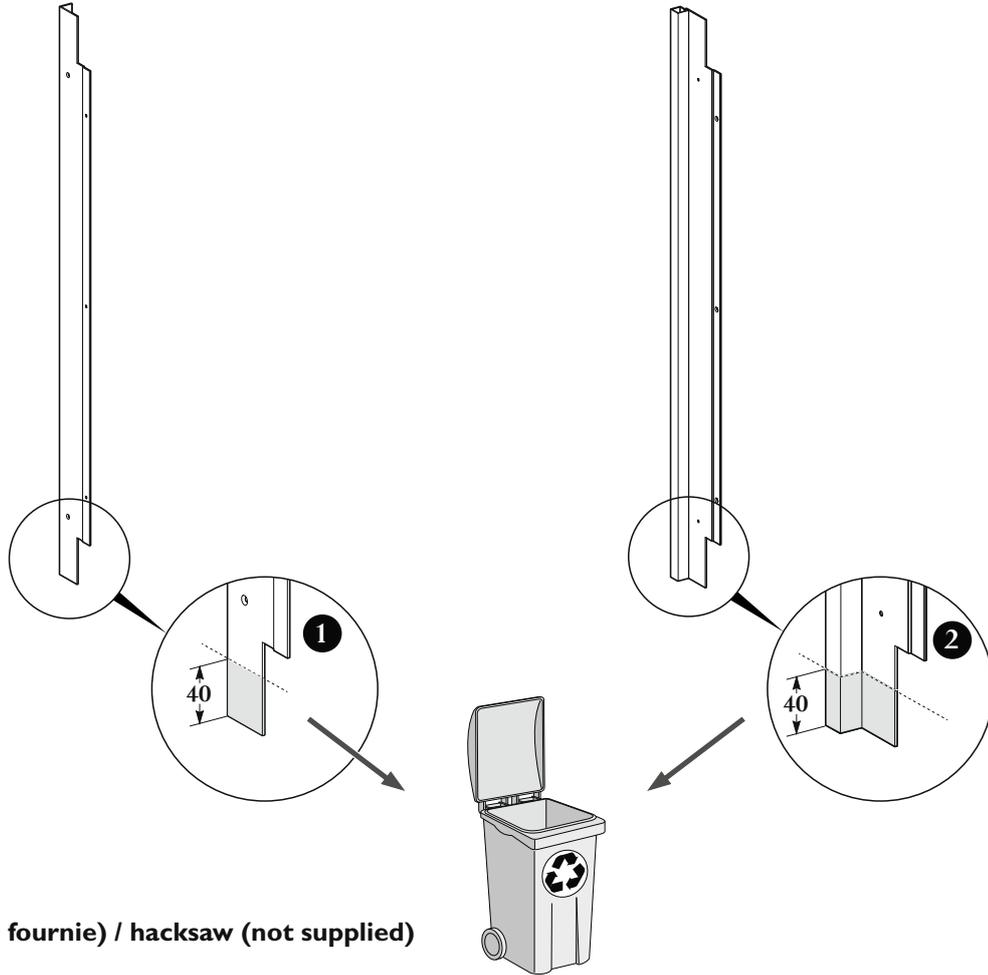

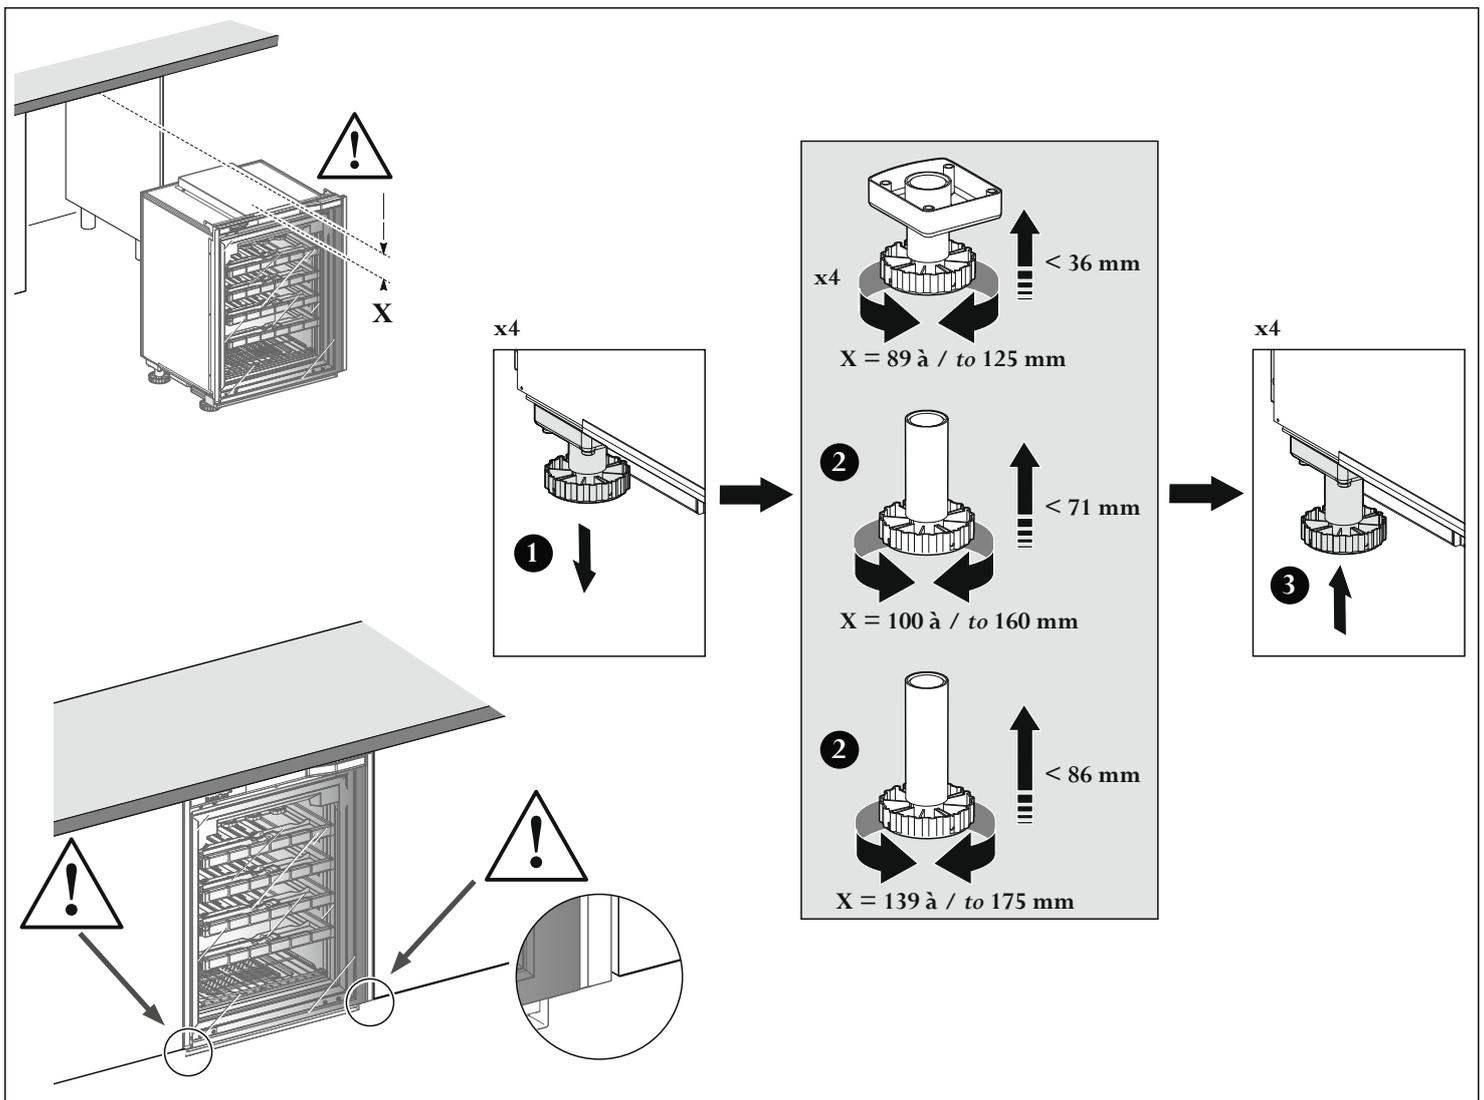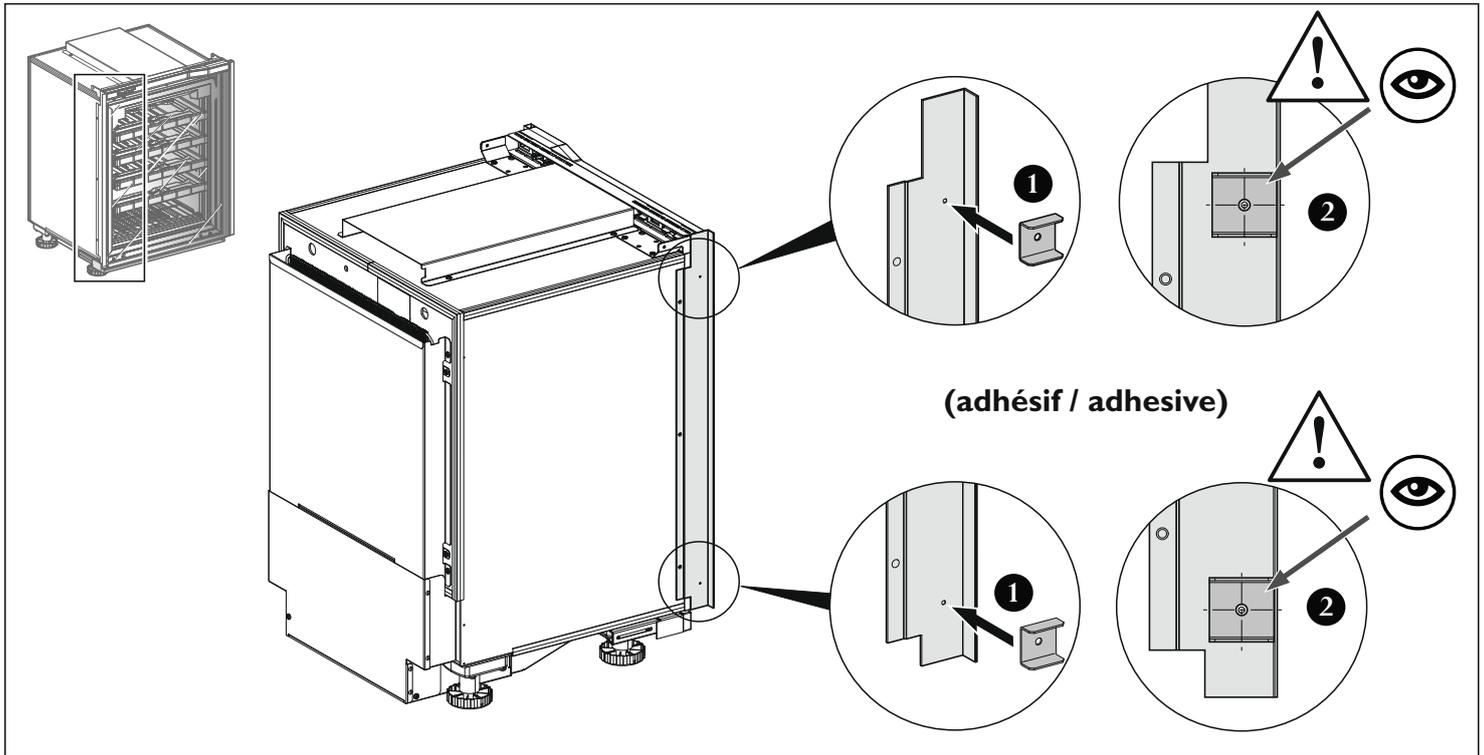

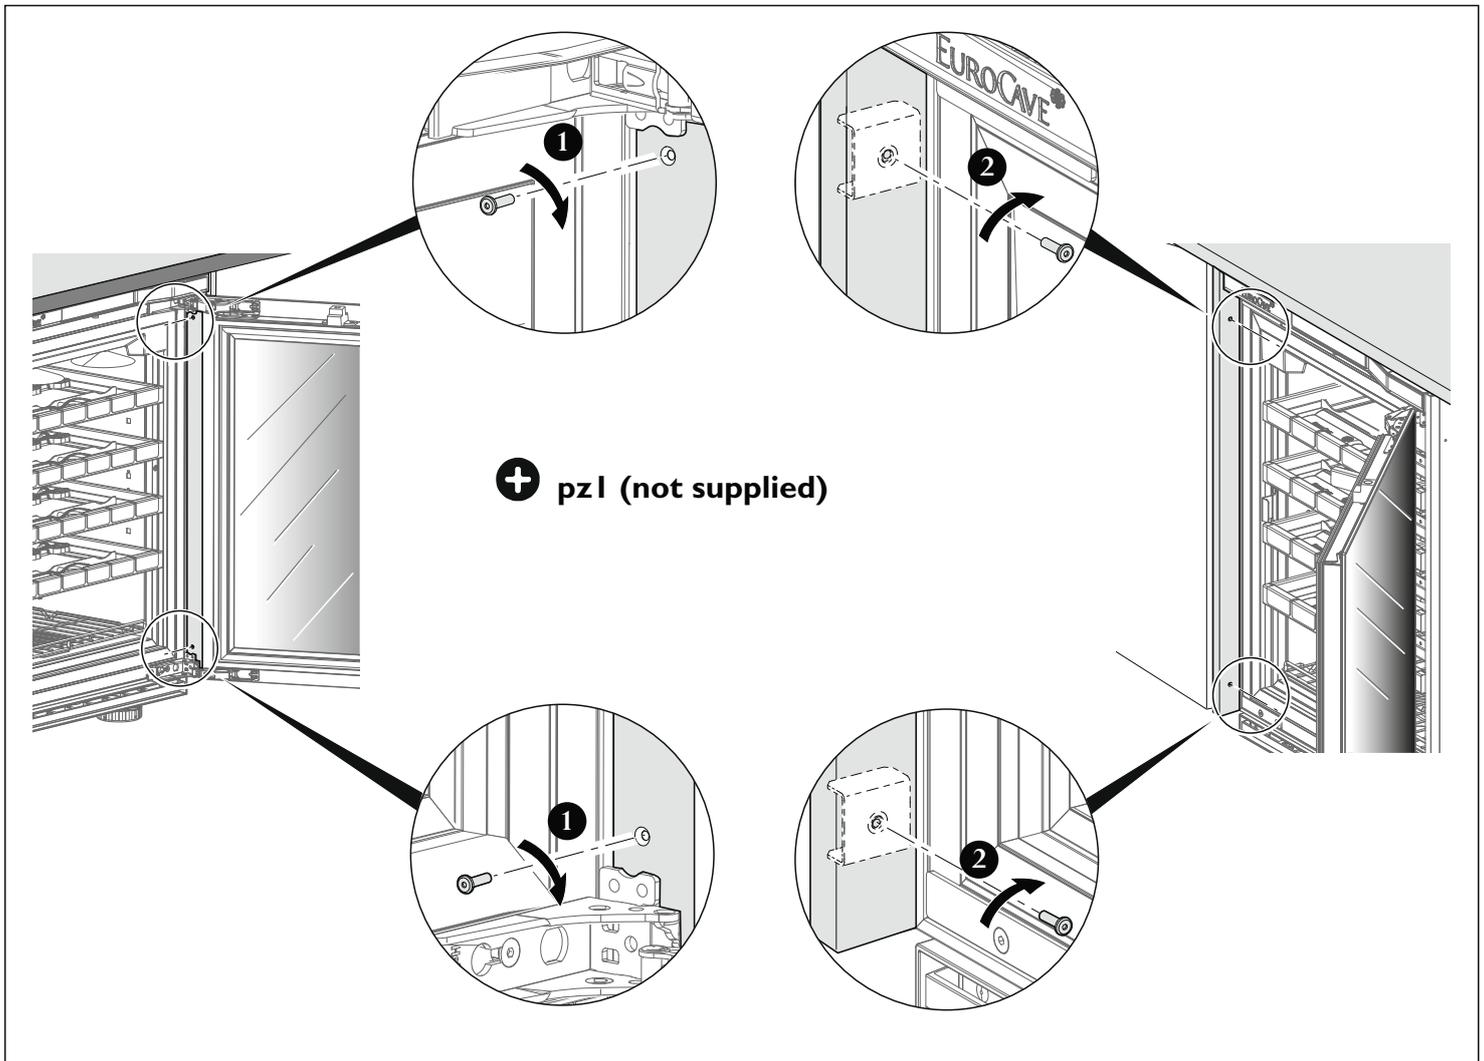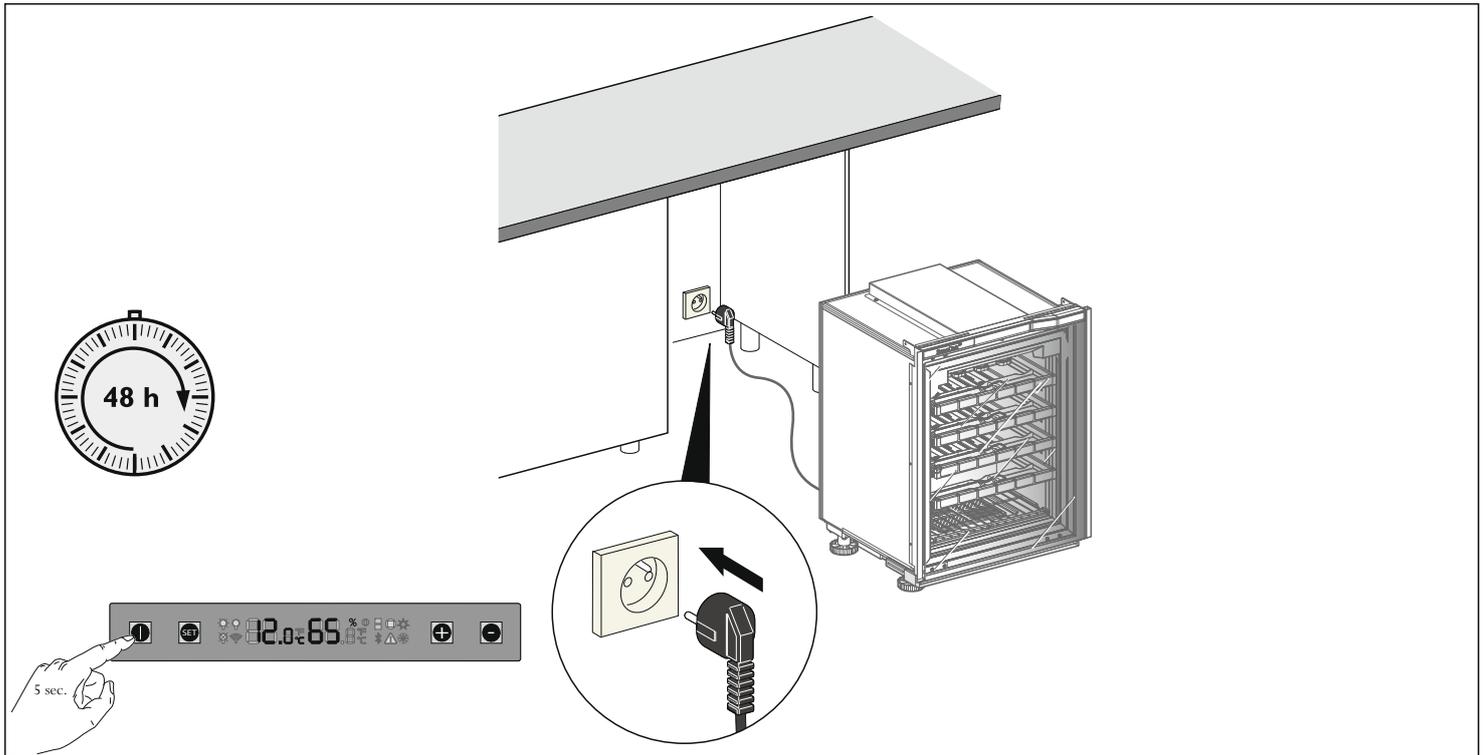

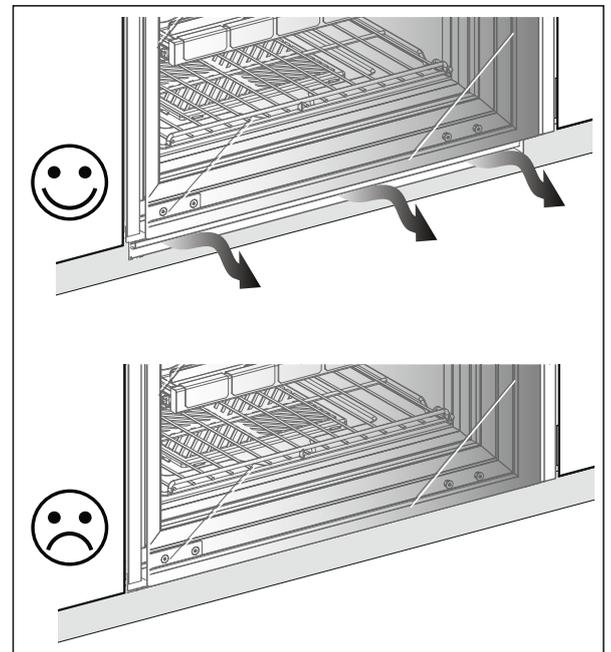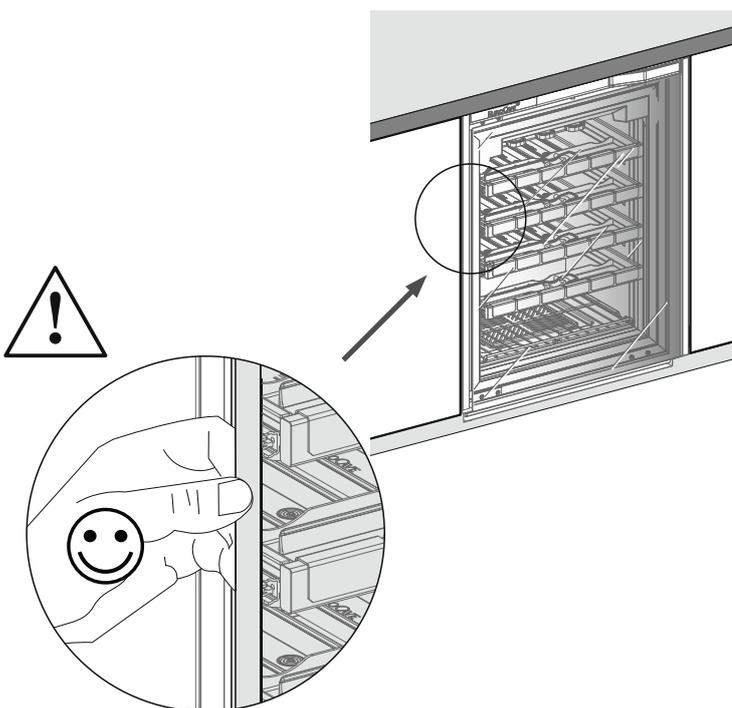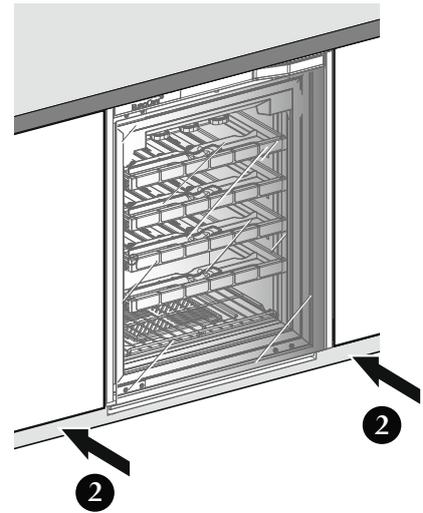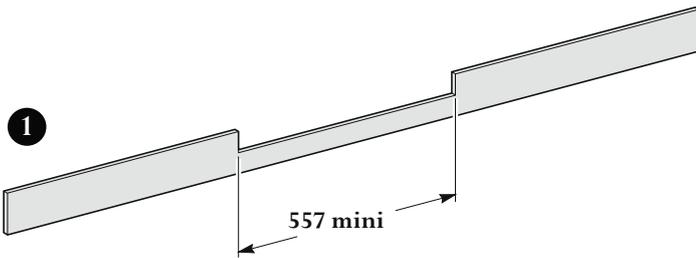
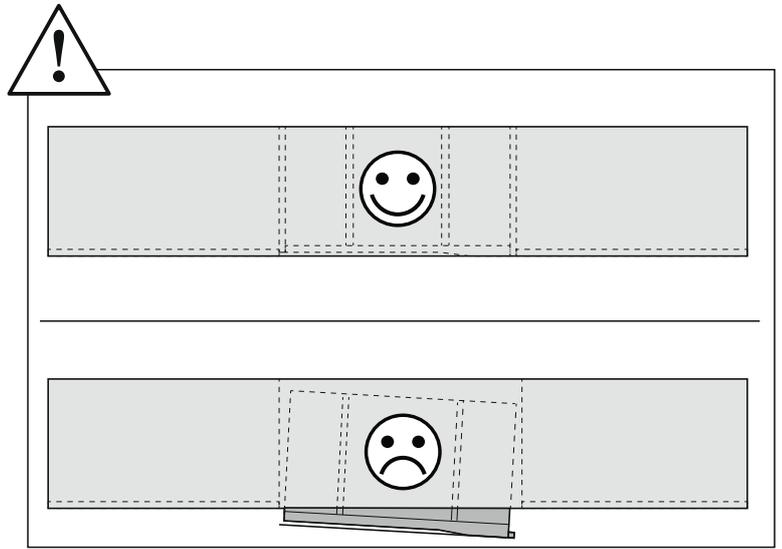
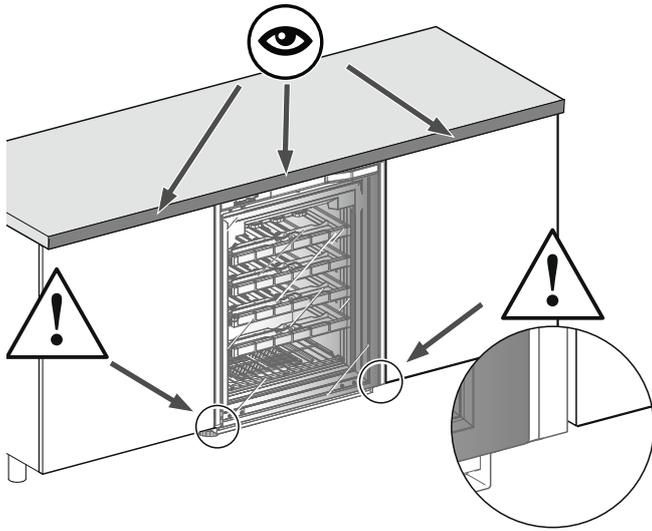




QUICKSTART





flush-fitted installation

**+** pzl (non fourni/not supplied)

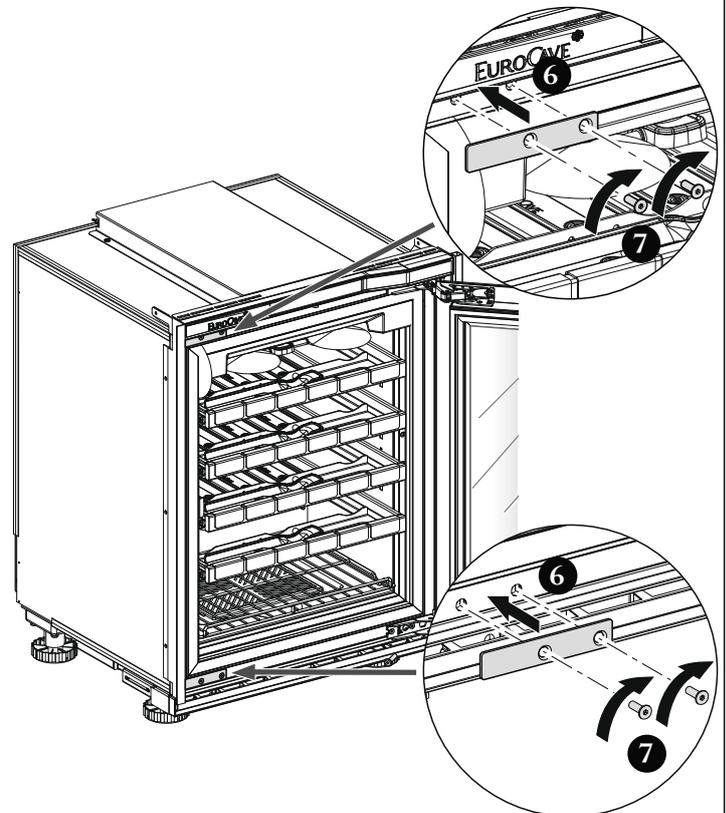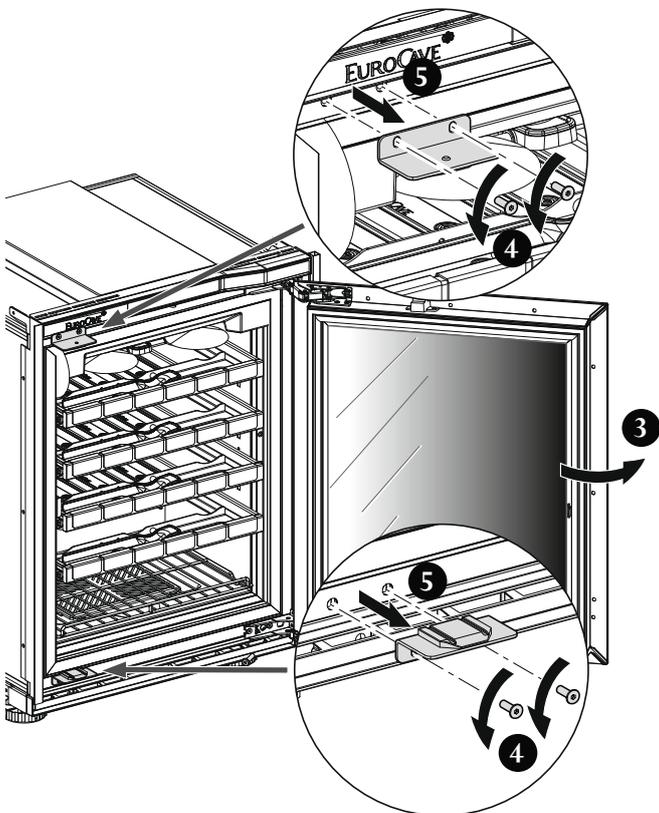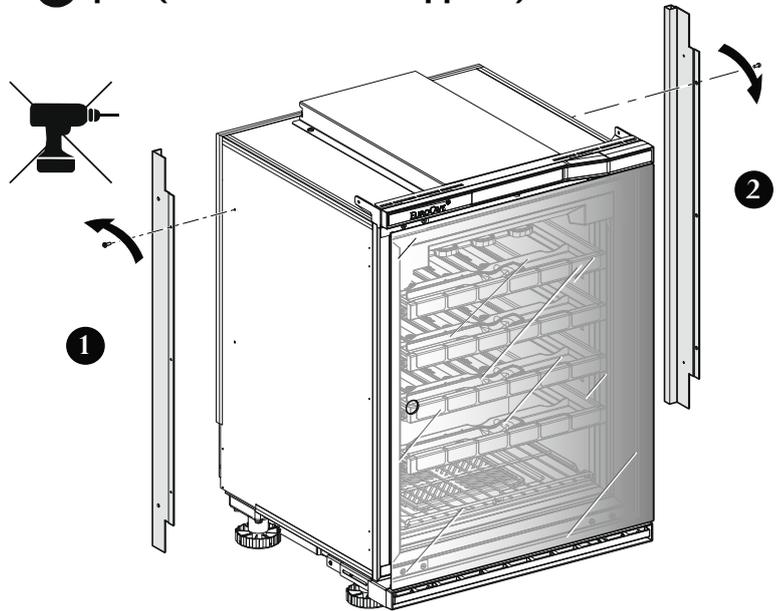




**○** 2.5 (non fourni/not supplied)

Sauf dans le cas d'une finition avec une porte technique. Cf. p.5.

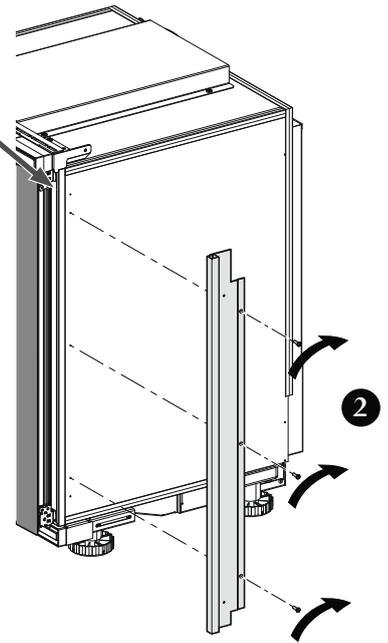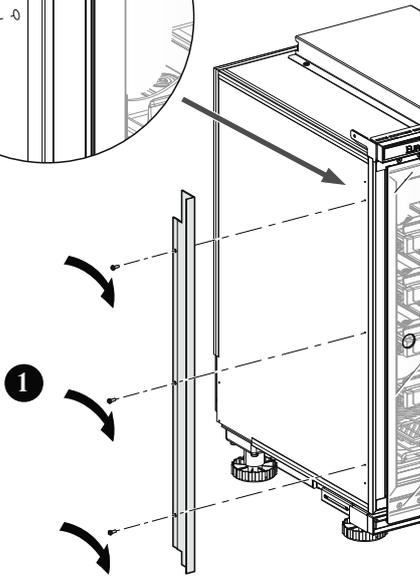


**+** pzl (non fourni/not supplied)

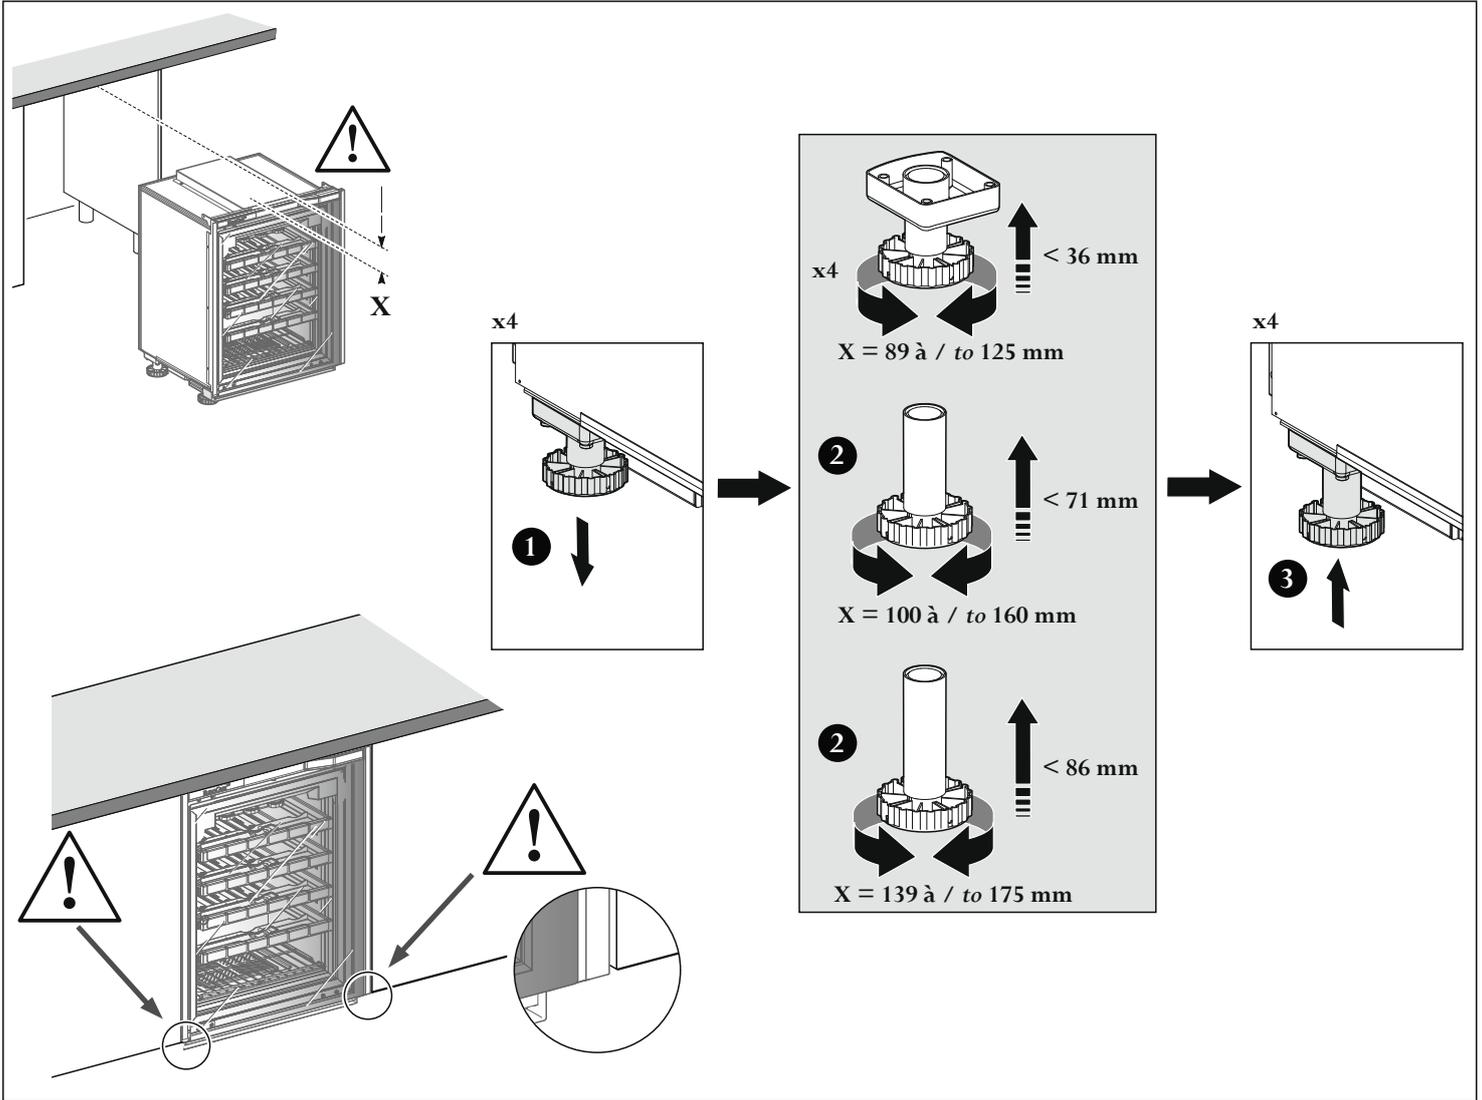

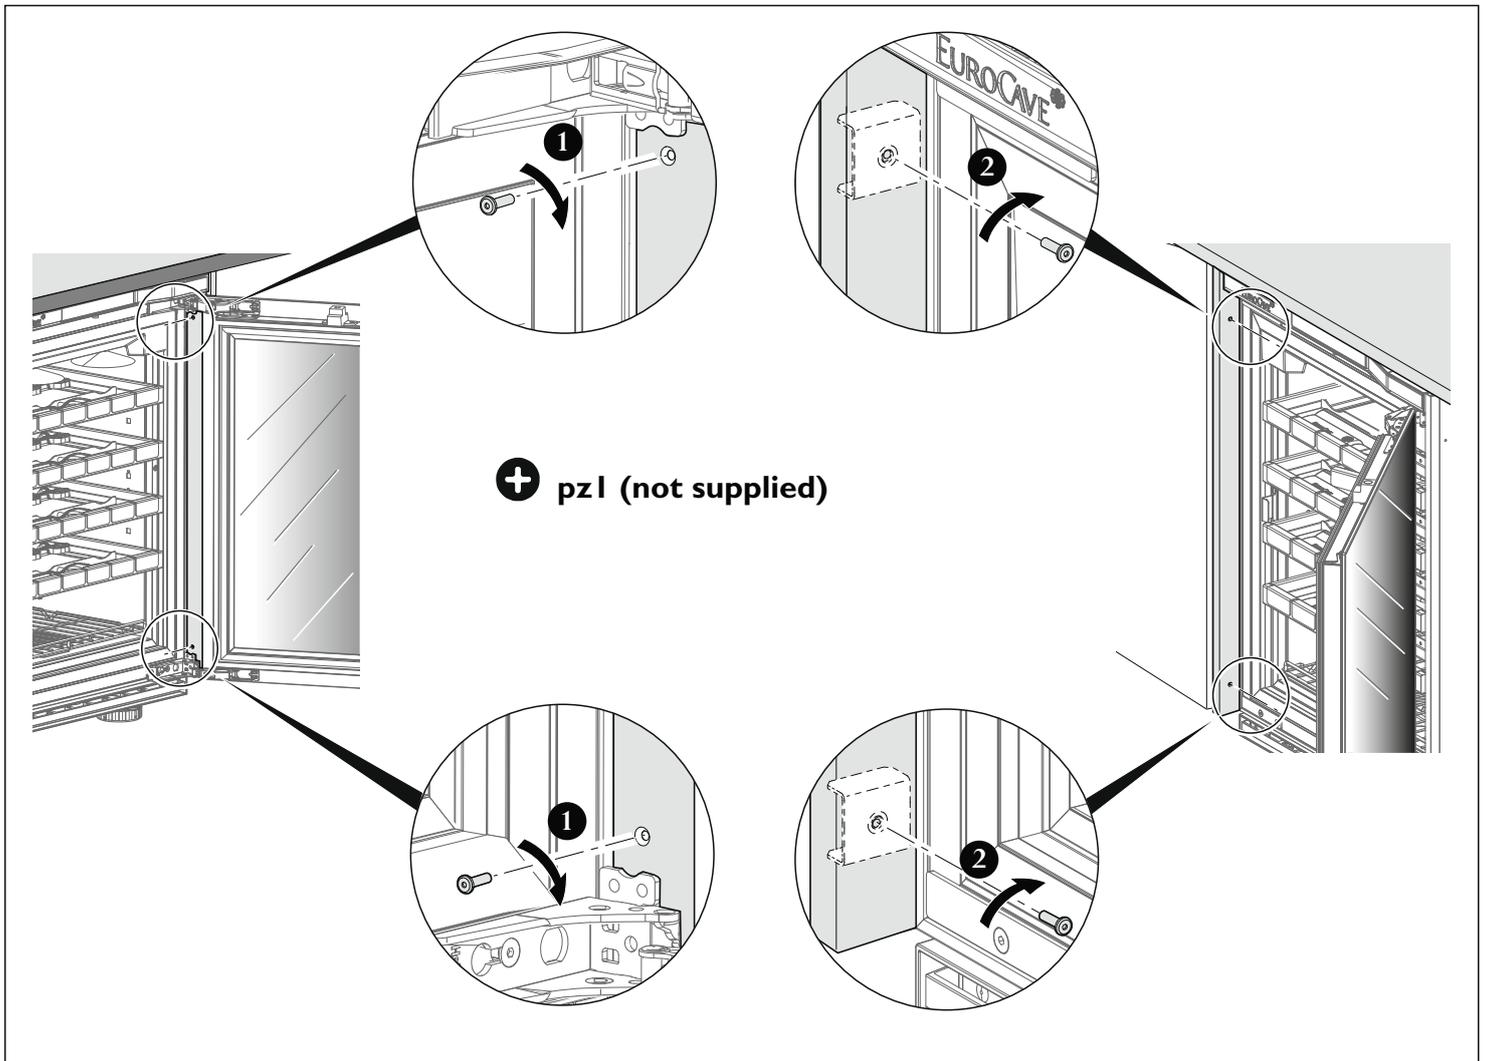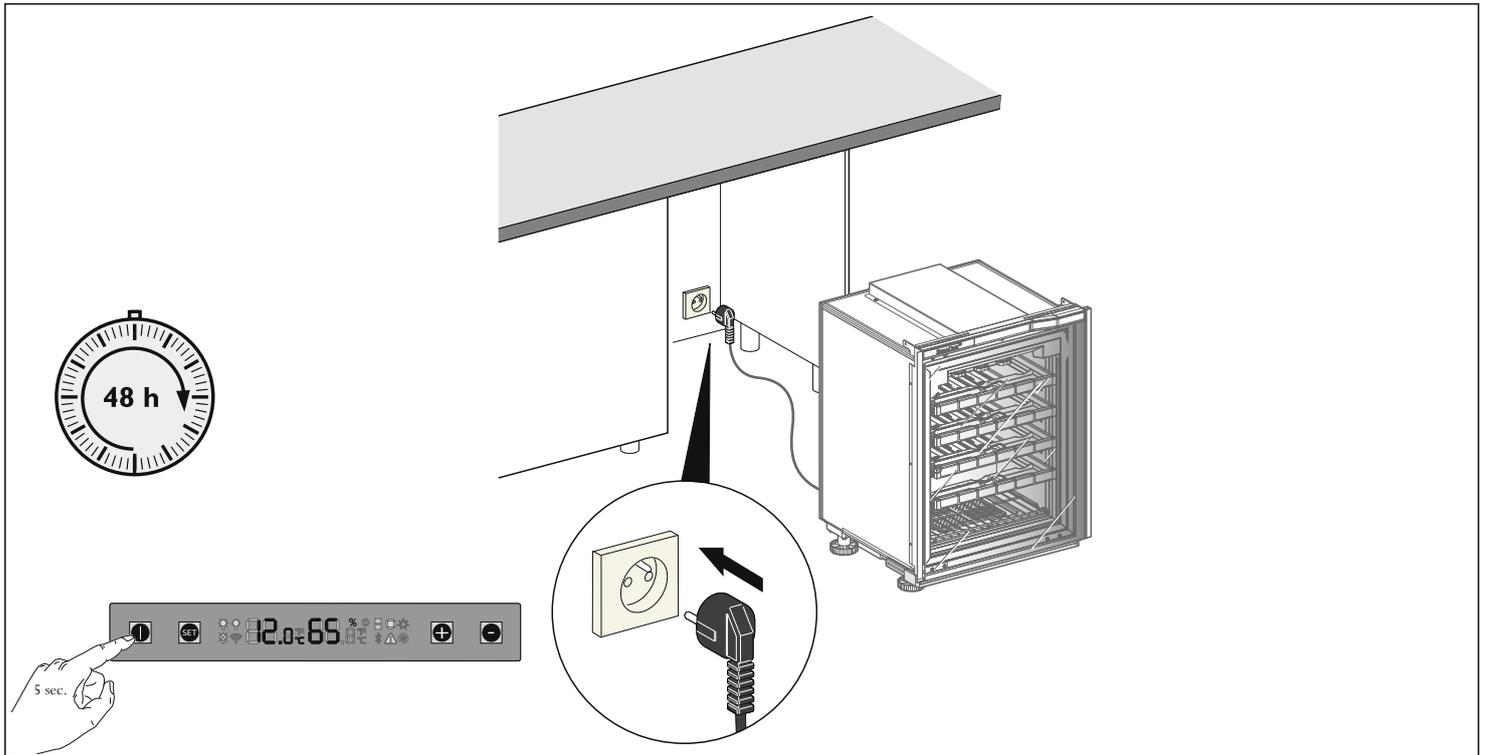




Format S et L en portes techniques pleines ou vitrées  
*S and L sizes in integrated solid and glass doors*

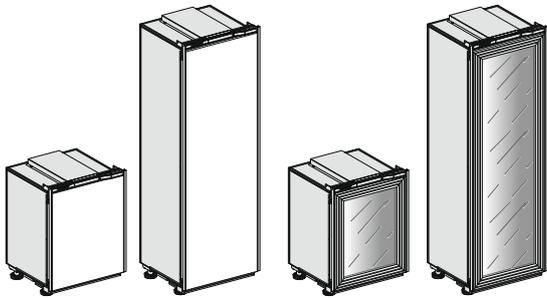

**+** pzl (non fourni/not supplied)

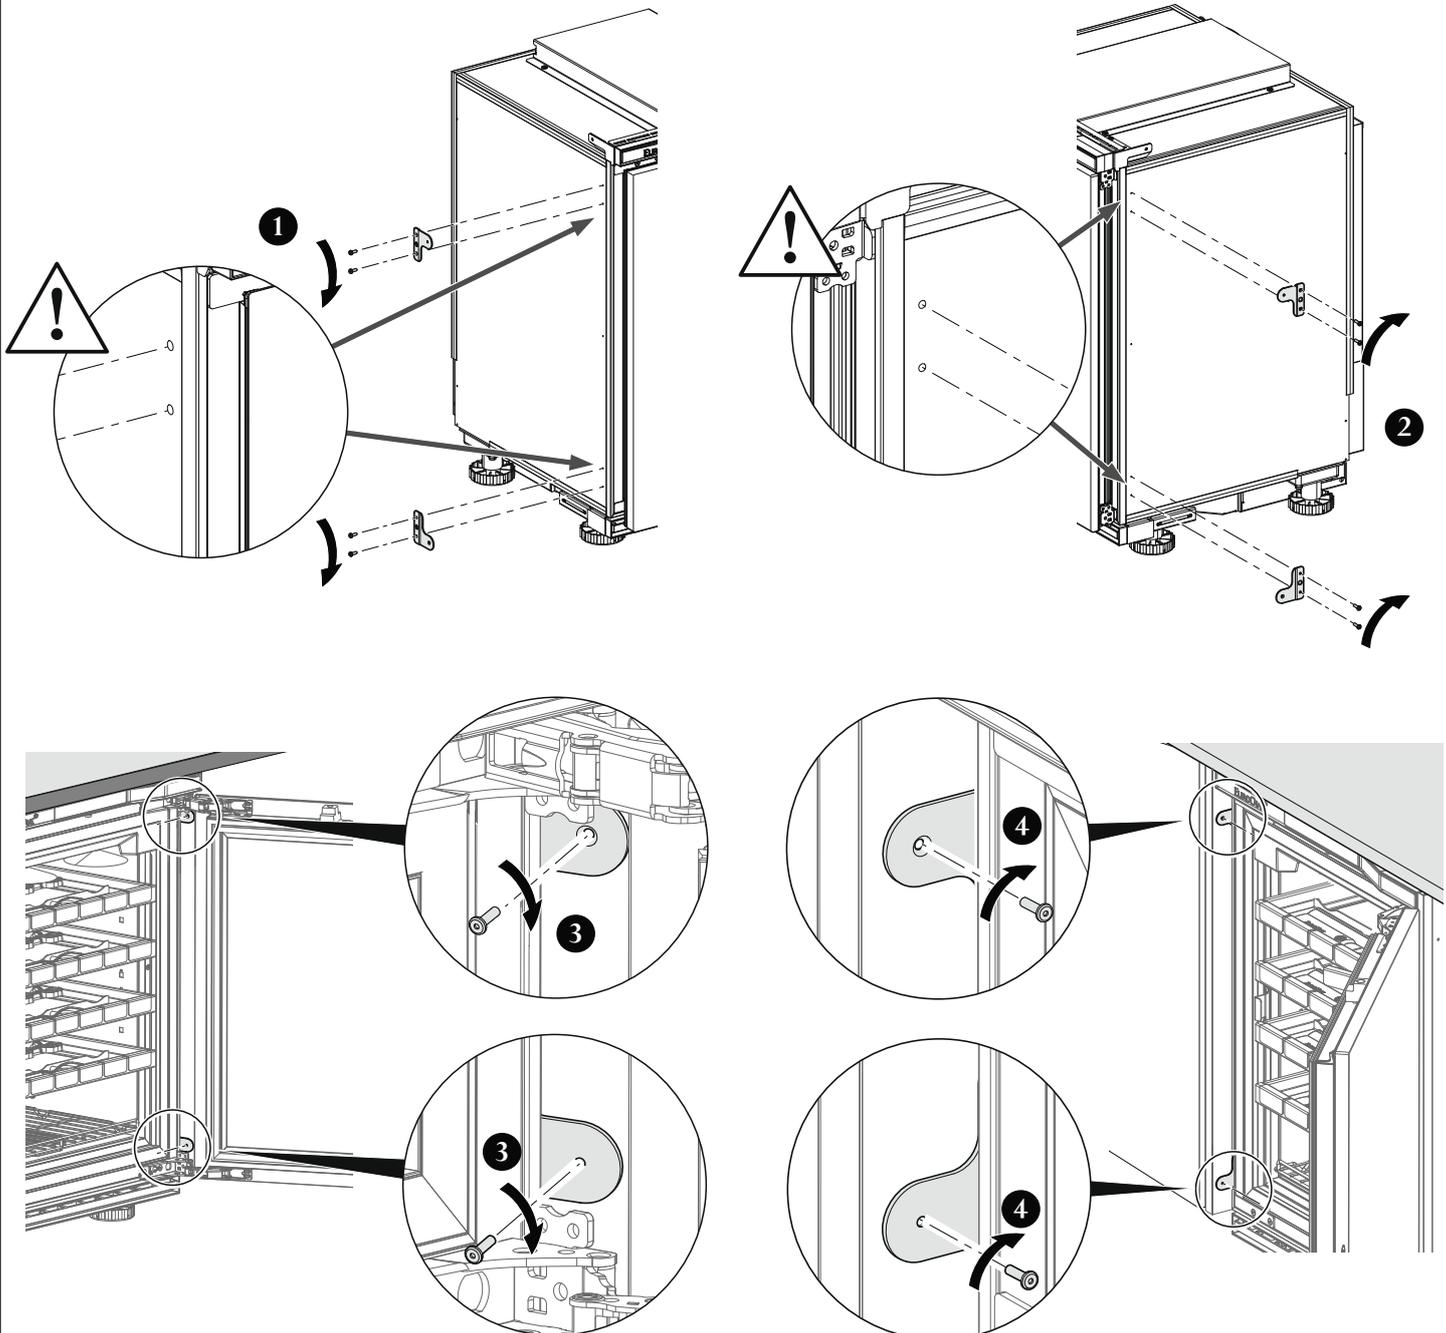



REALISATIONS



Size XS - Full glass door



Size S - Full Glass door



Size S - Technical glass door



Size S - Stainless steel and glass door



Size S - Full glass door



Sizes XS & S - Full glass door



Sizes XS, S & M - Full glass door & Technical glass door



Sizes M - Full glass door



Size L - Technical glass door



Size M - Stainless steel and glass door

