






## S-INSP-S

### Serving cabinet

## Built-in and Flush-fitted – Full Glass door **Multi-temperatures**









| Premium Pack<br>bottle capacity <sup>1</sup> | Service Pack<br>bottle capacity <sup>1</sup>             |
|--|--|
| 29   | 28   |
| 4 sliding shelves (+grid)                    | 2 sliding shelves<br>1 half shelf<br>1 Wine service area |

#### **TECHNICAL FEATURES**

#### REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- $^{\bullet}$  Temperature setting range from  $5^{\circ}\text{C}$  to  $20^{\circ}\text{C}$  (5-10  $^{\circ}\text{C}$  in the lower part and 15-20°C in the upper part). Temperature setting 8-18°C
- · Electronic external display and settings
- · LED screen with backlit tactile keys
- •Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
- Automatic defrost

|                                    | Full Glass door                  |
|------------------------------------|----------------------------------|
| Gross weight packaged empty (kg)   | 62,3                             |
| Empty net weight (kg)              | 53,8                             |
| Dimensions H x W x D (mm)          | 810-880 x 594 <sup>2</sup> x 590 |
| Dimensions packaged H x W x D (mm) | 980 x 645 x 630                  |

GENERAL FEATURES

#### **EQUIPMENT & ACCESSORIES**

#### **EQUIPMENT**

- · Reversible Full Glass door with soft close and door stop
- Inner lighting: light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet
- Lock

#### ACCESSORIES

- ·Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

#### HOT - COLD - INSULATION TECHNOLOGIES

Cold production:

• Static

Compressor R600a

Cords:

• CE/UK/AU/CH/US

Heat production:

• Heating element

Heat release:

· Automatic, adjustable threshold

Inner material:

Stucco aluminum

Exterior coating material:

• HDF (High Density Fiber)

melamine-faced panels Injected polyurethane foam

(59mm)

#### Insulation type:

<sup>1</sup> Traditional Bordeaux bottles

 $^3$  Calculation based on the result obtained over 24 hrs in standard conditions (25  $^{\circ}$ C / 77  $^{\circ}$ F)


#### ENERGY EFFICIENCY & CONSUMPTION

| T of 1  |            |
|---|------------|
| Type of door  | Full Glass |
| Energy efficiency class                               | A          |
| Annual energy consumption AEc <sup>3</sup> (Kwh/year) | 125        |
| Useful volume (liters)                                | 100        |
| Sound emission (dB(A))                                | 38         |
| Ambient temperature range (°C)                        | 12-35      |

<sup>&</sup>lt;sup>2</sup> With fillers

# **EUROCAVE**


## Installation diagrams

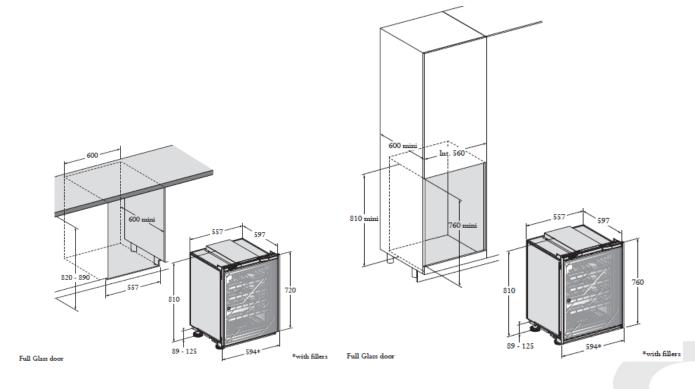


Built-in

Flush-fitted

## **Storage layouts**



Premium Pack



Service Pack