

S-INSP-S
Serving cabinet

Built-in and Flush-fitted – Integrated solid door
Multi-temperatures



Sliding shelf
(6 bottles)
ACMSIW / ACMSIB



Wine service area
(11 bottles)
ACMSERVW / ACMSERVB



Half shelf
(5 bottles)
ACMSI-DEMI

CONFIGURATIONS

Premium Pack bottle capacity ¹	Service Pack bottle capacity ¹
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

TECHNICAL FEATURES

REGULATION

- On/Off/Standby of the display button
- Electronic regulation
- Temperature setting range from 5°C to 20°C (5-10°C for the lower part and 15-20°C for the upper part). Temperature setting 8-18°C.
- Electronic external display and settings
- LED screen
- Backlit capacitive keys
- Visual and/or sound alarms in case of:
 - Temperature dysfunction (sound and visual)
 - Sensor fault (sound and visual)
 - Open door (sound and visual)
 - Need to replace charcoal filter (visual)
- Automatic defrost

HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static • Compressor R600a
Cords:	• CE/UK/AU/CH/US
Heat production:	• Heating element
Heat release:	• Automatic, adjustable threshold
Inner material:	• Stucco aluminum
Exterior coating material:	• HDF (High Density Fiber) melamine-faced panels
Insulation type:	• Injected polyurethane foam (59mm)

GENERAL FEATURES

	Integrated solid
Gross weight packaged (kg)	58,2
Empty net weight (kg) ²	49,7
Dimensions H x W x D (mm)	810-880 x 594 ³ x 590
Dimensions packaged H x W x D (mm)	980 x 645 x 630

EQUIPMENT & ACCESSORIES

EQUIPMENT

- Reversible integrated solid door with soft close and door stop
- Max thickness of the door panel: 20 mm
- Max weight of the door panel: 12 kg
- Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
- Charcoal filter
- 4 adjustable feet

ACCESSORIES

- Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 EuroCave key ring

ENERGY EFFICIENCY & CONSUMPTION

Cords	230V-50Hz (R600a)
Type of door	Integrated solid
Energy efficiency class	A+
Annual energy consumption AEC ⁴ (Kwh/year)	103
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35


¹ Traditional Bordeaux bottles

² Without cladding

³ Without fillers


⁴ Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

Dimensions of the decorative panel

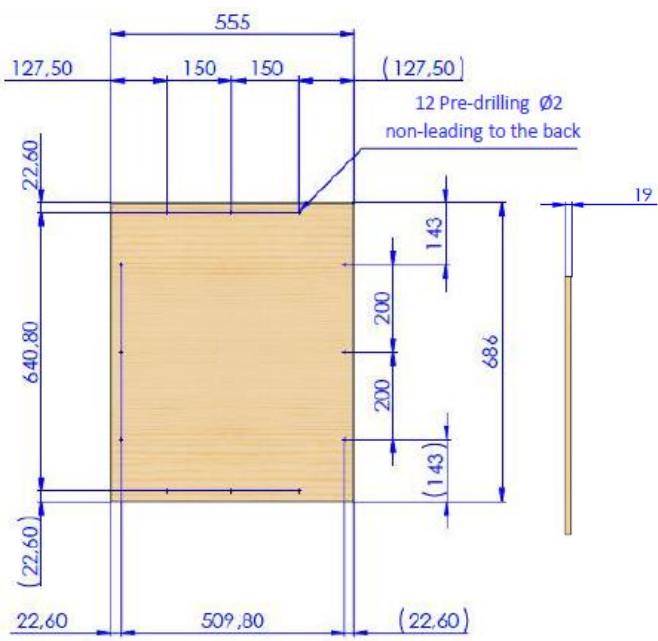


S SIZE

Storage layouts




Premium Pack




Service Pack

Installation diagrams

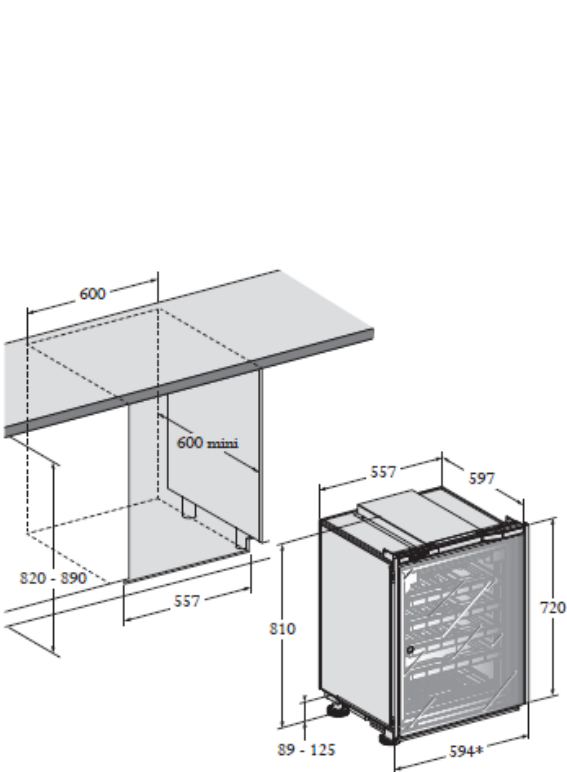

Built-in

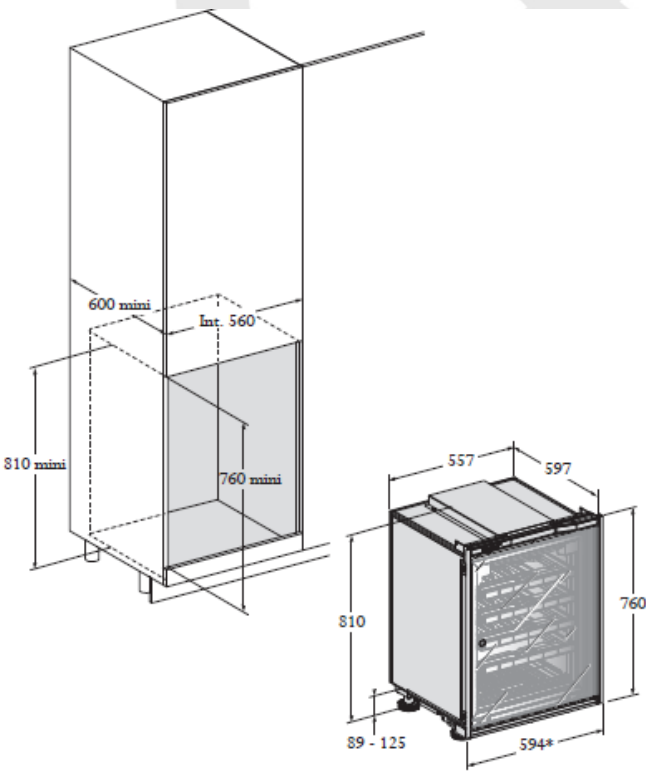

Flush-fitted